

## Research Article

# Passivity-Based Synchronization of Unified Chaotic System

K. Kemih,<sup>1</sup> M. Benslama,<sup>2</sup> and H. Baudrand<sup>3</sup>

<sup>1</sup>LAMEL Laboratory, Electrical Department, Jijel University, BP 98, 18000 Jijel, Algeria

<sup>2</sup>LET Laboratory, Electronics Department, Mentouri University, 25000 Constantine, Algeria

<sup>3</sup>National Institute Polytechnic, ENSEEIHT, 2 Rue Camichel, 31071 Toulouse Cedex, France

Correspondence should be addressed to K. Kemih, karim.kemih@mail.univ-jijel.dz

Received 3 November 2007; Revised 13 December 2007; Accepted 16 January 2008

Recommended by Guanrong Chen

This letter further improves and extends the work of Kemih et al. In detail, feedback passivity synchronization with only one controller for a unified chaotic system is discussed here. It is noticed that the unified system contains the noted Lorenz, Lu, and Chen systems. Numerical simulations are given to show the effectiveness of these methods.

Copyright © 2008 K. Kemih et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

## 1. INTRODUCTION

Chaotic systems are characterized by being extremely sensitive to initial conditions, deterministically random, and hence ultimately unpredictable. Chaotic systems have numerous potential applications in mechanics, laser and chemical technologies, communications, biology and medicine, economics, ecology, and so forth [1, 2].

During the last two decades, synchronization in chaotic dynamic systems has received a great deal of interest among scientists from various research fields, since Pecora and Carroll [3] introduced a method to synchronize two identical chaotic systems with different initial conditions. The idea of synchronization is to use the output of the master system to control the slave system so that the output of the response system follows the output of the master system asymptotically. A wide variety of approaches have been proposed for the synchronization of various chaotic systems which include PC method, OGY method, active control approach, impulsive control method, generalized predictive control, adaptive control method, time-delay feedback approach, and backstepping design technique [5–16]. Many people have begun to give their attention to passive network theory [17–20]. The character of passive system is one of the network theory concepts, which show characteristics of dissipative network. Passive network theory can be used to analyze the dynamical character of system, such as stabilization and dynamic characteristics.

In this paper, our aim is to synchronize two unified chaotic systems. To achieve this goal, passive control theory is used to study passive synchronization of two unified chaotic systems. We first show that the passive synchronization problem is a passive control problem. In the stable control region, the error dynamical system is transformed to a passive system, and then using the state feedback, the error dynamical system can be globally asymptotically stabilized at zero. Finally, some simulation results are provided for illustration and verification.

## 2. PROPERTIES OF PASSIVE SYSTEM

Some preliminaries of passivity theory used in this paper will be shortly reviewed for the consistency of the presentation. Passivity is applied to nonlinear systems which are modelled by ordinary differential equations with input vector  $u(t)$  and output vector  $y(t)$  [17]:

$$\begin{aligned}\dot{x}(t) &= f(x(t), u(t)), \\ y(t) &= h(x(t)).\end{aligned}\quad (1)$$

The system (1) is dissipative with the supply rate  $W(u(t), y(t))$ , if it is not able to generate power by itself, that is, the energy stored in the system is less than or equal to the supplied power:

$$V(x(t)) \geq 0, \quad V(x(T)) - V(x(0)) \leq \int_0^T W(u(t), y(t)) dt. \quad (2)$$

Furthermore, the storage function  $V(x(t))$  must satisfy the requirements for a Lyapunov function. If there exists a positive semidefinite Lyapunov function, such that

$$\begin{aligned} & \int u^T(\tau)y(\tau)d\tau \\ & \geq \int \left[ \frac{\partial V(x(\tau))}{\partial x(\tau)} f(x(\tau), u(\tau)) + eu^T + \delta y^T(\tau)y(\tau) \right. \\ & \quad \left. + \rho\phi(x(\tau)) \right] d\tau \end{aligned} \quad (3)$$

then the system (1) is passive. A passive system implies that any increase in storage energy is due solely to an external power supply.

Then the equilibrium point of the system:

$$\dot{x}(t) = f(t, x(t), 0) \quad (4)$$

is asymptotically stable in either of the two cases:

- (i)  $\rho > 0$ ,
- (ii)  $e + \delta > 0$  and the system is zeros-state observation.

The system (1) can be represented as the normal form:

$$\begin{aligned} \dot{x} &= f(z) + g(z, y)y, \\ \dot{y} &= l(z, y) + k(z, y)u. \end{aligned} \quad (5)$$

The nonlinear system (5) may be rendered bay a state feedback of the form [17]

$$u = \gamma_{12} + \beta(x)v. \quad (6)$$

### 3. PASSIVE SYNCHRONIZATION OF UNIFIED CHAOTIC SYSTEM

We consider unified chaotic system [21]:

$$\begin{aligned} \dot{x}_1 &= (25\alpha + 10)(x_2 - x_1), \\ \dot{x}_2 &= -x_1x_3 + (29\alpha - 1)x_2 + (28 - 35\alpha)x_1, \\ \dot{x}_3 &= x_1x_2 - \frac{8 + \alpha}{3}x_3, \end{aligned} \quad (7)$$

where  $\alpha \in [0, 1]$ , which contains the canonical Lorenz system [21, 23] and Chen system [24] as two extremes and Lü system [25] as a special case. Obviously, when  $\alpha = 0$ ,  $\alpha = 0.8$ , and  $\alpha = 1$ , it is the Lorenz chaotic attractor, Lü chaotic attractor and Chen chaotic attractor, respectively. What is interesting is that as the parameter  $\alpha$  changes continuously from 0 to 1, the resulting system remains continuously to be chaotic.

We will study the passive synchronization of two chaotic systems. Let system (7) be the drive system, and the response system is modelled by the following equation:

$$\begin{aligned} \dot{y}_1 &= (25\alpha + 10)(y_2 - y_1), \\ \dot{y}_2 &= -y_1y_3 + (29\alpha - 1)y_2 + (28 - 35\alpha)y_1, \\ \dot{y}_3 &= y_1y_2 - \frac{8 + \alpha}{3}y_3. \end{aligned} \quad (8)$$

Let  $e = (e_1, e_2, e_3)^T = (y_1 - x_1, y_2 - x_2, y_3 - x_3)^T$  be the synchronization error, and then the controlled model of error synchronization system is given by

$$\begin{aligned} \dot{e}_1 &= -(25\alpha + 10)e_1 + (25\alpha + 10)e_2, \\ \dot{e}_2 &= (28 - 35\alpha - x_3)e_1 + (29\alpha - 1)e_2 - x_1e_3 - e_1e_3 + u, \\ \dot{e}_3 &= x_2e_1 + x_1e_2 - \frac{8 + \alpha}{3}e_3 + e_1e_2. \end{aligned} \quad (9)$$

The error synchronization system (9) is already in the normal form of (5), where  $z_1 = e_1$ ,  $z_2 = e_3$ ,  $y = e_2$ ,  $z = [z_1, z_2]^T$ :

$$\begin{aligned} f(z) &= \left[ -(25\alpha + 10)z_1, x_2z_1 - \frac{8 + \alpha}{3}z_2 \right], \\ g(z, y) &= [(25\alpha + 10), x_1 + z_1]^T, \end{aligned}$$

$$\begin{aligned} l(z, y) &= (28 - 35\alpha - x_3)z_1 + (29\alpha - 1)y - x_1z_2 - z_1z_2, \\ k(z, y) &= 1. \end{aligned} \quad (10)$$

Our object is to design a smooth control (6) for the error synchronization system to make the closed-loop system passive. Choose a storage function candidate:

$$V(z, y) = W(z) + \frac{1}{2}y^2, \quad (11)$$

where  $W(z)$  is Lyapunov function, with  $W(0) = 0$ ,

$$W(z) = \frac{1}{2}(z_1^2 + z_2^2). \quad (12)$$

The zero dynamics of the system (5) describes those internal dynamics which are consistent with external constraint  $y = 0$ , that is,

$$\dot{z} = f(z). \quad (13)$$

Considering (13) and because  $\alpha > 0$  is positive constant,

$$\begin{aligned} \frac{d}{dt}W(z) &= -(25\alpha + 10)z_1^2 + x_2z_1z_2 - \frac{8 + \alpha}{3}z_2^2, \\ \frac{d}{dt}W(z) &= -(25\alpha + 10)\left(z_1 - \frac{x_2z_2}{2(25\alpha + 10)}\right)^2 \\ &\quad - \left(\frac{8 + \alpha}{3} - \frac{x_2^2}{4(25\alpha + 10)}\right)z_2^2. \end{aligned} \quad (14)$$

In addition, we have

$$\frac{8 + \alpha}{3} - \frac{x_2^2}{4(25\alpha + 10)} = \frac{(100\alpha^2 + 840\alpha + 320) - 3x_1^2}{12(25\alpha + 10)} > 0. \quad (15)$$

Then

$$\frac{d}{dt}W(z) \leq 0. \quad (16)$$

The zero dynamics of error synchronization system is Lyapunov stable. The derivative of  $V(z, y)$  along the trajectory of the error synchronization system (9) is

$$\begin{aligned} \frac{d}{dt} V(z, y) &= \frac{\partial}{\partial z} W(z) \dot{z} + y \dot{y} \\ &= \frac{\partial}{\partial z} W(z) f(z) + \frac{\partial}{\partial z} W(z) g(z, y) y \\ &\quad + l(z, y) y + k(z, y) y. \end{aligned} \quad (17)$$

The error synchronization system is minimum phase:

$$\frac{d}{dt} W(z) f(z) \leq 0. \quad (18)$$

Equation (17) becomes

$$\frac{d}{dt} V(z, y) \leq \frac{\partial}{\partial z} W(z) g(z, y) y + (l(z, y) + k(z, y) u) y. \quad (19)$$

If we select the feedback control (6) of the following form and consider (10):

$$\begin{aligned} u &= k^{-1}(z, y) \left[ -l^T(z, y) - \frac{\partial W}{\partial z} g(z, y) - \gamma_{12} y + v \right] \\ &= -(38 - 10\alpha - x_3) z_1 - (29\alpha - 1 + \gamma_{12}) y + v, \end{aligned} \quad (20)$$

where  $\gamma_{11}$  is positive constant, and  $v$  is an external signal which is connected with the reference input, the above inequality can be rewritten as

$$\frac{d}{dt} V(z, y) \leq -(\gamma_{12} + 29\alpha - 1) y^2 + v y. \quad (21)$$

Then by integrating both sides of (21), we have

$$\begin{aligned} &V(z, y) - V(z_0, y_0) \\ &\leq \int_0^t -(\gamma_{12} + 29\alpha - 1) y(\tau)^2 d\tau + \int_0^t v(\tau) y(\tau) d\tau, \end{aligned} \quad (22)$$

$$V(z, y) \geq 0, \text{ and } \rho = V(z_0, y_0),$$

$$\begin{aligned} V(z, y) - V(z_0, y_0) &\leq \int_0^t -(\gamma_{12} + 29\alpha - 1) y(\tau)^2 d\tau + V(z, y) \\ &\geq \int_0^t -(\gamma_{12} + 29\alpha - 1) y(\tau)^2 d\tau. \end{aligned} \quad (23)$$

It satisfies the passive definition (3). The error synchronization system (9) is rendered to be output strict passive (OSP) under the feedback control. If external signal  $v = 0$ , then we want to steer state of error synchronization system to the origin.

#### 4. SIMULATION RESULTS

Unified chaotic system has attractor for  $\alpha = 0.8$ . The typical unified chaotic attractor is shown in Figure 1.

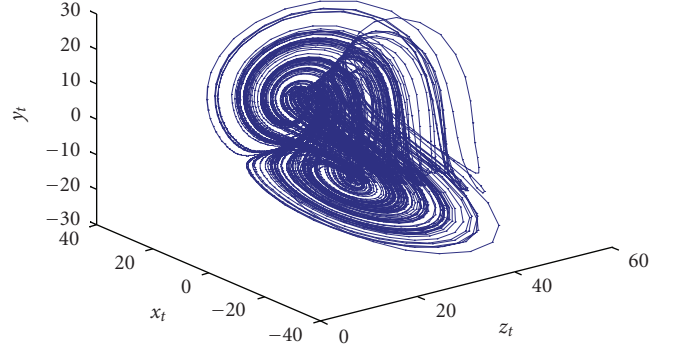


FIGURE 1: The typical unified chaotic attractors.

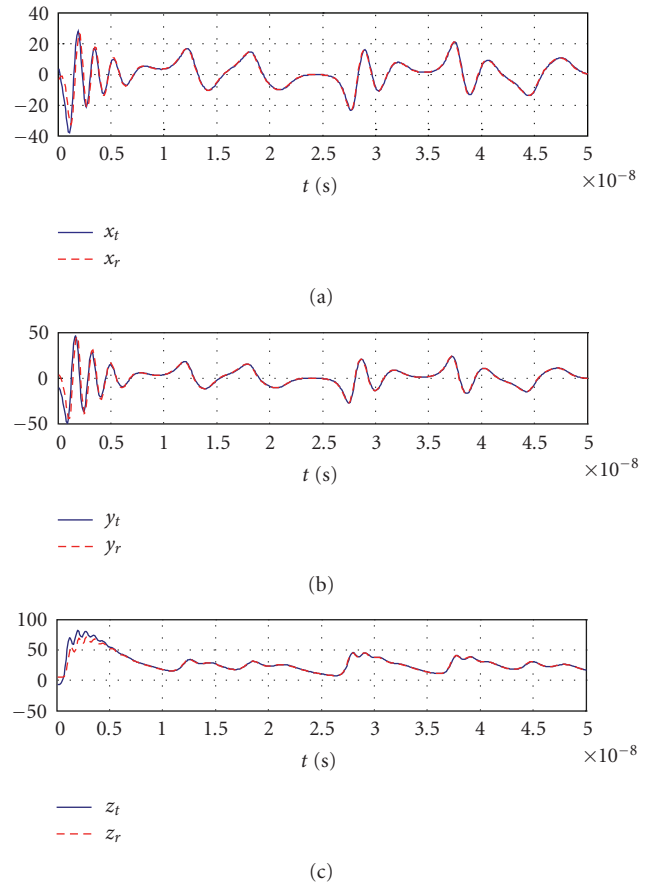


FIGURE 2: Synchronization of two unified chaotic systems.

The goal is to force the two systems to synchronize under control, while they have different initial conditions. The drive system starts from  $[8 \ -9 \ -7]$  and the response system from  $[-6 \ 5 \ 6]$ . We select  $\gamma_{12} = 11$  and use the controller as in (20):  $u = -(30 - x_3)e_1 - 33.2e_2$ .

In Figures 2 and 3, we note that the system is quickly and perfectly synchronized, also the bigger  $\gamma_{12}$  gives the best performance.

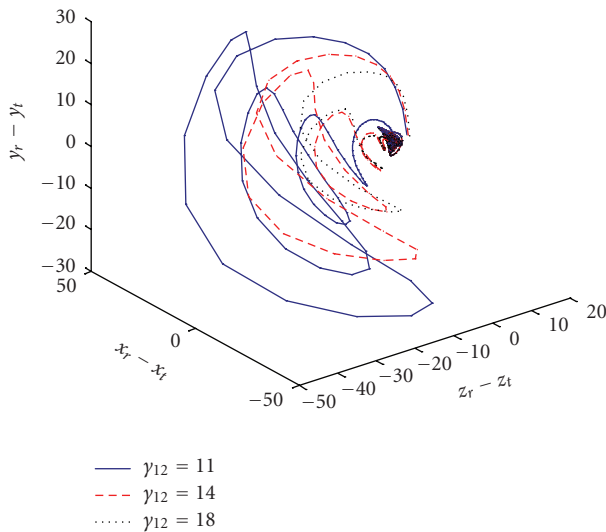


FIGURE 3: Phase-space trajectory.

## 5. CONCLUSION

In this paper, we have shown that the passivity-based synchronization can be used to synchronize unified chaotic system. The controller is very simple and has linear feedback form for the synchronization error system. It is noticed that the unified system contains the noted Lorenz, Lu, and Chen systems. Numerical simulations given show the effectiveness of these methods.

## ACKNOWLEDGMENT

The authors gratefully acknowledge the helpful comments and suggestions of the reviewers, which have improved the presentation.

## REFERENCES

- [1] K. Kemih and M. Benslama, "Synchronized chaotic Lu system in CDMA satellite communication using genetic algorithm," in *Proceedings of International Conference on Digital Telecommunications (ICDT '06)*, p. 33, Cote d'Azur, France, August-September 2006.
- [2] K. Karim, K. Mosbah, B. Malek, and B. Achour, "Performance of discrete wavelet transform with convolutional code in chaotic DS-CDMA system for microsatellite communication," in *Proceedings of International Geoscience and Remote Sensing Symposium (IGARSS '04)*, vol. 1, pp. 601–604, Anchorage, Alaska, USA, September 2004.
- [3] L. M. Pecora and T. L. Carroll, "Synchronization in chaotic systems," *Physical Review Letters*, vol. 64, no. 8, pp. 821–824, 1990.
- [4] J. H. Park and O. M. Kwon, "A novel criterion for delayed feedback control of time-delay chaotic systems," *Chaos, Solitons & Fractals*, vol. 23, no. 2, pp. 495–501, 2005.
- [5] M. Chen and Z. Han, "Controlling and synchronizing chaotic Genesio system via nonlinear feedback control," *Chaos, Solitons & Fractals*, vol. 17, no. 4, pp. 709–716, 2003.
- [6] J. Lu, X. Wu, and J. Lü, "Synchronization of a unified chaotic system and the application in secure communication," *Physics Letters A*, vol. 305, no. 6, pp. 365–370, 2002.
- [7] S. Bowong and F. M. Moukam Kakmeni, "Synchronization of uncertain chaotic systems via backstepping approach," *Chaos, Solitons & Fractals*, vol. 21, no. 4, pp. 999–1011, 2004.
- [8] J. Lü, T. Zhou, and S. Zhang, "Chaos synchronization between linearly coupled chaotic systems," *Chaos, Solitons & Fractals*, vol. 14, no. 4, pp. 529–541, 2002.
- [9] H.-K. Chen, "Global chaos synchronization of new chaotic systems via nonlinear control," *Chaos, Solitons & Fractals*, vol. 23, no. 4, pp. 1245–1251, 2005.
- [10] Y. Wang, Z.-H. Guan, and H. O. Wang, "Feedback and adaptive control for the synchronization of Chen system via a single variable," *Physics Letters A*, vol. 312, no. 1-2, pp. 34–40, 2003.
- [11] J. Lu, X. Wu, X. Han, and J. Lü, "Adaptive feedback synchronization of a unified chaotic system," *Physics Letters A*, vol. 329, no. 4-5, pp. 327–333, 2004.
- [12] Q. Zhang and J. Lu, "Impulsive control and synchronization of a critical chaotic system," *Wuhan University Journal of Natural Sciences*, vol. 12, no. 3, pp. 426–430, 2007.
- [13] J. Lu, X. Wu, and J. Lü, "Synchronization of a unified chaotic system and the application in secure communication," *Physics Letters A*, vol. 305, no. 6, pp. 365–370, 2002.
- [14] C.-H. Tao, J. Lu, and J. Lü, "The feedback synchronization of a unified chaotic system," *Acta Physica Sinica*, vol. 51, no. 7, pp. 1497–1501, 2002.
- [15] X.-Q. Wu and J.-A. Lu, "Parameter identification and backstepping control of uncertain Lü system," *Chaos, Solitons & Fractals*, vol. 18, no. 4, pp. 721–729, 2003.
- [16] K. Kemih and W.-Y. Liu, "Constrained generalized predictive control of chaotic Lu system," *ICIC Express Letters*, vol. 1, no. 1, pp. 39–44, 2007.
- [17] K. Kemih, S. Filali, M. Benslama, and M. Kimouche, "Passivity-based control of chaotic Lu system," *International Journal of Innovative Computing, Information and Control*, vol. 2, no. 2, pp. 331–337, 2006.
- [18] K. Kemih, M. Benslama, S. Filali, W. Y. Liu, and H. Baudrand, "Synchronization of Chen system based on passivity technique for CDMA underwater communication," *International Journal of Innovative Computing, Information And Control*, vol. 3, no. 5, pp. 1301–1308, 2007.
- [19] C. I. Byrnes, A. Isidori, and J. C. Willems, "Passivity, feedback equivalence, and the global stabilization of minimum phase nonlinear systems," *IEEE Transactions on Automatic Control*, vol. 36, no. 11, pp. 1228–1240, 1991.
- [20] I. G. Polushin, D. J. Hill, and A. L. Fradkov, "Strict quasipassivity and ultimate boundedness for nonlinear control systems," in *Proceedings of the 4th IFAC Symposium on Nonlinear Control Systems (NOLCOS '98)*, vol. 2, pp. 527–532, Enschede, The Netherlands, 1998.
- [21] J. Lü, G. Chen, D. Cheng, and S. Celikovskiy, "Bridge the gap between the Lorenz system and the Chen system," *International Journal of Bifurcation and Chaos*, vol. 12, no. 12, pp. 2917–2926, 2002.
- [22] J. H. Park, "Stability criterion for synchronization of linearly coupled unified chaotic systems," *Chaos, Solitons & Fractals*, vol. 23, no. 4, pp. 1319–1325, 2005.
- [23] E. N. Lorenz, "Deterministic nonperiodic flow," *Journal of the Atmospheric Sciences*, vol. 20, no. 2, pp. 130–141, 1963.
- [24] G. Chen and T. Ueta, "Yet another chaotic attractor," *International Journal of Bifurcation and Chaos*, vol. 9, no. 7, pp. 1465–1466, 1999.
- [25] J. Lü and G. Chen, "A new chaotic attractor coined," *International Journal of Bifurcation and Chaos*, vol. 12, no. 3, pp. 659–661, 2002.

## Special Issue on Fuzzy Logic Techniques for Clean Environment

### Call for Papers

The fuzzy technique for clean energy, solar and wind energy, is the most readily available source of energy, and one of the important sources of the renewable energy, because it is nonpolluting and, therefore, helps in lessening the greenhouse effect. The benefits arising from the utilization of solar and wind energy systems can be categorized into two sections: energy saving and the decrease of environmental pollution. The clean energy saving benefits come from the reduction in electricity consumption and from using any conventional energy supplier, which can avoid the expenditure of fuel supply. The other main benefit of the renewable energy is the decrease of environmental pollution, which can be achieved by the reduction of emissions due to the usage of electricity and conventional power stations. Electricity production using solar and wind energy is of the main research areas at present in the field of renewable energies, the significant price fluctuations are seen for the fossil fuel in one hand, and the trend toward privatization that dominates the power markets these days in the other hand, will drive the demand for solar technologies in the near term. The process of solar distillation is used worldwide for arid communities that do not have access to potable water. Also some solar technologies provide other benefits beside power generation, that is, fresh water (using desalination techniques).

The main focus of this special issue will be on the applications of fuzzy techniques for clean energy. We are particularly interested in manuscripts that report the fuzzy techniques applications of clean energy (solar, wind, desalination, etc.). Potential topics include, but are not limited to:

- Solar power station
- Wind power
- Photovoltaic and renewable energy engineering
- Renewable energy commercialization
- Solar cities
- Solar powered desalination unit
- Solar power
- Solar power plants
- Solar systems (company)
- World solar challenge

- Seawater desalination to produce fresh water
- Desalination for long-term water security

Before submission authors should carefully read over the journal's Author Guidelines, which are located at <http://www.hindawi.com/journals/afs/guidelines.html>. Prospective authors should submit an electronic copy of their complete manuscript through the journal Manuscript Tracking System at <http://mts.hindawi.com/>, according to the following timetable:

Manuscript Due	October 1, 2009
First Round of Reviews	January 1, 2010
Publication Date	April 1, 2010

#### Guest Editors

**Rustom M. Mamlook**, Middle East University for Graduate Studies, Amman, Jordan; [rstmamlk@hotmail.com](mailto:rstmamlk@hotmail.com)

#### Guest Editors

**S. Paramasivam**, ESAB Engineering Services Limited, Tamil Nadu 600 058, India; [param@ieee.org](mailto:param@ieee.org)

**Mohammad Ameen Al-Jarrah**, American University of Sharjah, P.O. Box 26666, Sharjah, UAE; [mjarrah@aus.edu](mailto:mjarrah@aus.edu)

**Zeki Ayag**, Kadir Has University, 34083 Istanbul, Turkey; [zekia@khas.edu.tr](mailto:zekia@khas.edu.tr)

**Ashok B. Kulkarni**, University of Technology, Kingston 6, Jamaica; [kulkarniab2@rediffmail.com](mailto:kulkarniab2@rediffmail.com)

## Special Issue on Selected Papers from Workshop on Synergies in Communications and Localization (SyCoLo 2009)

### Call for Papers

In conjunction with the IEEE International Conference on Communications (ICC) 2009 in Dresden, Germany, the International Workshop on Synergies in Communications and Localization (SyCoLo 2009) will be held.

The main objective of this workshop is to show how wireless communications and navigation/localization techniques can benefit from each other. With respect to these synergies the workshop aims at the following fundamental questions:

- How can navigation systems benefit from existing communications systems?
- How can communication systems benefit from positioning information of mobile terminals?

This workshop, whose proposal was jointly generated by the EU Research Projects WHERE and NEWCOM++, aims at inspiring the development of new position-aware procedures to enhance the efficiency of communication networks, and of new positioning algorithms based both on (outdoor or indoor) wireless communications and on satellite navigation systems.

The SyCoLo 2009 is, therefore, well in agreement with the new IJNO journal aims at promoting and diffusing the aims of joint communications and navigation among universities, research institutions, and industries.

This proposed IJNO Special Issue focuses all the research themes related to the timing aspects of joint communications and navigation, and starts from the SyCoLo 2009 where the Guest Editors will attend the different sessions and directly invite the authors of the most promising papers to submit an extended version of their papers to the journal.

The proposed Guest Editors are also part of the Scientific Committees of the SyCoLo 2009, therefore, directly involved in the evaluation of submitted papers.

Topics of interest will include, but are not limited to:

- Hybrid positioning using both wireless communications and satellite navigation systems
- Resource management with positioning information
- Location-aware PHY/MAC algorithms/procedures

- Indoor positioning combined with short-range communications
- Signal processing techniques for (seamless) indoor/outdoor localization

Before submission authors should carefully read over the journal's Author Guidelines, which are located at <http://www.hindawi.com/journals/ijno/guidelines.html>. Prospective authors should submit an electronic copy of their complete manuscript through the journal Manuscript Tracking System at <http://mts.hindawi.com/> according to the following timetable:

Manuscript Due	October 1, 2009
First Round of Reviews	January 1, 2010
Publication Date	April 1, 2010

### Lead Guest Editor

**Ronald Raulefs**, German Aerospace Center (DLR), Institute of Communications and Navigation, Oberpfaffenhofen, Wessling 82234, Germany; [ronald.raulefs@dlr.de](mailto:ronald.raulefs@dlr.de)

### Guest Editors

**Simon Plass**, Institute of Communications and Navigation, German Aerospace Center (DLR), 82234 Wessling, Germany; [simon.plass@dlr.de](mailto:simon.plass@dlr.de)

**Marco Luise**, Dipartimento di Ingegneria dell'Informazione, Università di Pisa, Via G. Caruso 16, 56126 Pisa, Italy; [marco.luise@iet.unipi.it](mailto:marco.luise@iet.unipi.it)

## Special Issue on Machine Learning Paradigms for Modeling Spatial and Temporal Information in Multimedia Data Mining

### Call for Papers

Multimedia data mining and knowledge discovery is a fast emerging interdisciplinary applied research area. There is tremendous potential for effective use of multimedia data mining (MDM) through *intelligent* analysis. Diverse application areas are increasingly relying on multimedia understanding systems. Advances in multimedia understanding are related directly to advances in signal processing, computer vision, machine learning, pattern recognition, multimedia databases, and smart sensors.

The main mission of this special issue is to identify state-of-the-art machine learning paradigms that are particularly powerful and effective for modeling and combining temporal and spatial media cues such as audio, visual, and face information and for accomplishing tasks of multimedia data mining and knowledge discovery. These models should be able to bridge the gap between low-level audiovisual features which require signal processing and high-level semantics. Original contributions, not currently under review or accepted by another journal, are solicited in relevant areas including (but not limited to) the following:

- Multiresolution-based video mining and features extraction
- Dimension reduction and unsupervised data clustering for multimedia content analysis tasks
- Mining methods and algorithms (classification, regression, clustering, probabilistic modelling), as well as association analysis
- Machine learning paradigms that perform spatial and temporal data mining
- Machine learning paradigms that allow for an effective learning of hidden patterns
- Object recognition and tracking using machine learning algorithms
- Interactive data exploration and machine learning discovery
- Mining of structured, textual, multimedia, spatiotemporal, and web data
- Application of MDM to contents-based image/video retrieval and medical data

Before submission authors should carefully read over the journal's Author Guidelines, which are located at <http://www.hindawi.com/journals/aai/guidelines.html>. Prospective authors should submit an electronic copy of their complete manuscript through the journal Manuscript Tracking System at <http://mts.hindawi.com/> according to the following timetable:

Manuscript Due	October 1, 2009
First Round of Reviews	January 1, 2010
Publication Date	April 1, 2010

#### Lead Guest Editor

**Djamel Bouchaffra**, Grambling State University, Grambling, LA, USA; [dbouchaffra@ieee.org](mailto:dbouchaffra@ieee.org)

#### Guest Editors

**Ce Zhu**, Nanyang Technological University, Singapore; [eczhu@ntu.edu.sg](mailto:eczhu@ntu.edu.sg)

**Abbes Amira**, Brunel University, Uxbridge, Middlesex, UK; [abbes.amira@brunel.ac.uk](mailto:abbes.amira@brunel.ac.uk)

**Chu-Song Chen**, Institute of Information Science, Taipei, Taiwan; [song@iis.sinica.edu.tw](mailto:song@iis.sinica.edu.tw)