

## Boundary layer flow over a moving surface in a nanofluid with suction or injection

Norfifah Bachok · Anuar Ishak · Ioan Pop

Received: 28 August 2010 / Revised: 28 March 2011 / Accepted: 10 May 2011

©The Chinese Society of Theoretical and Applied Mechanics and Springer-Verlag Berlin Heidelberg 2012

**Abstract** An analysis is performed to study the heat transfer characteristics of steady two-dimensional boundary layer flow past a moving permeable flat plate in a nanofluid. The effects of uniform suction and injection on the flow field and heat transfer characteristics are numerically studied by using an implicit finite difference method. It is found that dual solutions exist when the plate and the free stream move in the opposite directions. The results indicate that suction delays the boundary layer separation, while injection accelerates it.

**Keywords** Nanofluid · Moving plate · Boundary layer · Suction/injection · Dual solutions

### 1 Introduction

It is well known that conventional heat transfer fluids such as water, mineral oil and ethylene glycol have, in general, poor

heat transfer properties compared to those of most solids. An innovative way of improving the heat transfer of fluids is to suspend small solid particles in the fluids. This new kind of fluids named as “nanofluids” was introduced in 1995 by Choi [1]. The term nanofluid is used to describe a solid liquid mixture which consists of base liquid with low volume fraction of high conductivity solid nanoparticles. These fluids enhance enormously the thermal conductivity of the base fluid which is beyond the explanation of any existing theory. They are also very stable and have no additional problems, such as sedimentation, erosion, additional pressure drop and non-Newtonian behavior, due to the tiny size of nanoelements and the low volume fraction of nanoelements required for conductivity enhancement. These, with their various potential applications, have recently attracted intensive studies on nanofluids [2–13]. The use of particles of nanometer dimension was first continuously studied by a research group at the Argonne National Laboratory around a decade ago. These suspended nanoparticles can change the transport and thermal properties of the base fluid. The comprehensive references on nanofluids can be found in the recent book [14] and in review papers [15–21].

The aim of the present paper is to extend the work by Rohni et al. [22] to the case where the plate is permeable. The governing partial differential equations are first transformed into a system of ordinary differential equations before being solved numerically. The numerical results obtained are then compared with those reported by Rohni et al. [22] for an impermeable plate. Suction or injection of a fluid through the bounding surface, as, for example, in mass transfer cooling, can significantly change the flow field and, as a consequence, affect the heat transfer rate at the surface. In general, suction tends to increase the skin friction and heat transfer coefficients, whereas injection acts in the opposite manner [23]. Injection of fluid through a porous bounding heated or cooled surface is of general interest in practical application including film cooling, control of boundary

---

N. Bachok

Department of Mathematics and Institute  
for Mathematical Research,  
Faculty of Science, Universiti Putra Malaysia,  
43400 UPM Serdang, Selangor, Malaysia

A. Ishak (✉)

School of Mathematical Sciences,  
Faculty of Science and Technology,  
Universiti Kebangsaan Malaysia, 43600  
UKM Bangi, Selangor, Malaysia  
e-mail: anuar\_mi@ukm.my

I. Pop

Faculty of Mathematics, University of Cluj,  
CP 253, Romania

layer etc. This can lead to enhanced heating (or cooling) of the system and can help to delay the transition from laminar flow [24]. We mention to this end that studies of the boundary layer flows of a Newtonian (or regular) fluid past a permeable static or moving flat plate have been done by Merkin [25], Weidman et al. [26], Ishak et al. [27], Zheng et al. [28], and Zhu et al. [29,30], while Bachok et al. [31,32] have considered the boundary layers over a vertical plate in the regular Newtonian fluid.

## 2 Problem formulation

Consider a steady two-dimensional boundary layer flow past a moving semi-infinite permeable flat plate in a water based nanofluid containing different type of nanoparticles: Cu, Al<sub>2</sub>O<sub>3</sub> and TiO<sub>2</sub>. The nanofluid is assumed incompressible and the flow is assumed laminar. It is also assumed that the base fluid (i.e. water) and the nanoparticles are in thermal equilibrium and no slip occurs between them. Further, it is assumed that the plate moves with a constant velocity  $\bar{u}_w = \lambda U$ , where  $\lambda$  is a constant and  $U$  is the constant free stream velocity or the velocity of the far field (inviscid) flow [26]. We consider a Cartesian coordinate system  $(\bar{x}, \bar{y})$ , where  $\bar{x}$  and  $\bar{y}$  are the coordinates measured along the plate and normal to it, respectively, and the flow takes place at  $\bar{y} \geq 0$ . It is also assumed that the constant temperature of the moving surface is  $T_w$  and that of the ambient nanofluid is  $T_\infty$ , where  $T_w > T_\infty$  (heated plate).

Using the nanofluid model proposed by Tiwari and Das [13], the basic steady conservation of mass, momentum and energy equations in the coordinates  $\bar{x}$  and  $\bar{y}$  can be written as

$$\frac{\partial \bar{u}}{\partial \bar{x}} + \frac{\partial \bar{v}}{\partial \bar{y}} = 0, \quad (1)$$

$$\bar{u} \frac{\partial \bar{u}}{\partial \bar{x}} + \bar{v} \frac{\partial \bar{u}}{\partial \bar{y}} = -\frac{1}{\rho_{nf}} \frac{\partial \bar{p}}{\partial \bar{x}} + \frac{\mu_{nf}}{\rho_{nf}} \left( \frac{\partial^2 \bar{u}}{\partial \bar{x}^2} + \frac{\partial^2 \bar{u}}{\partial \bar{y}^2} \right), \quad (2)$$

$$\bar{u} \frac{\partial \bar{v}}{\partial \bar{x}} + \bar{v} \frac{\partial \bar{v}}{\partial \bar{y}} = -\frac{1}{\rho_{nf}} \frac{\partial \bar{p}}{\partial \bar{y}} + \frac{\mu_{nf}}{\rho_{nf}} \left( \frac{\partial^2 \bar{v}}{\partial \bar{x}^2} + \frac{\partial^2 \bar{v}}{\partial \bar{y}^2} \right), \quad (3)$$

$$\bar{u} \frac{\partial T}{\partial \bar{x}} + \bar{v} \frac{\partial T}{\partial \bar{y}} = \alpha_{nf} \left( \frac{\partial^2 T}{\partial \bar{x}^2} + \frac{\partial^2 T}{\partial \bar{y}^2} \right), \quad (4)$$

where we assume that the boundary conditions are

$$\begin{aligned} \bar{v} = \bar{v}_w, \quad \bar{u} = \bar{u}_w = \lambda U, \quad T = T_w, \quad \text{at } \bar{y} = 0, \\ \bar{u} = \bar{u}_e = U, \quad \bar{v} = 0, \quad T = T_\infty, \quad \bar{p} = p_\infty, \quad \text{as } \bar{y} \rightarrow \infty. \end{aligned} \quad (5)$$

Here  $\bar{u}$  and  $\bar{v}$  are the velocity components along the  $\bar{x}$  and  $\bar{y}$  axes, respectively,  $T$  is the temperature of the nanofluid,  $\bar{p}$  is the fluid pressure,  $\mu_{nf}$  is the viscosity of the nanofluid,  $\alpha_{nf}$  is the thermal diffusivity of the nanofluid and  $\rho_{nf}$  is the density of the nanofluid, which are given [12]

$$\begin{aligned} \alpha_{nf} &= \frac{k_{nf}}{(\rho C_p)_{nf}}, \\ \rho_{nf} &= (1 - \varphi)\rho_f + \varphi\rho_s, \\ \mu_{nf} &= \frac{\mu_f}{(1 - \varphi)^{2.5}}, \end{aligned} \quad (6)$$

$$(\rho C_p)_{nf} = (1 - \varphi)(\rho C_p)_f + \varphi(\rho C_p)_s,$$

$$\frac{k_{nf}}{k_f} = \frac{(k_s + 2k_f) - 2\varphi(k_f - k_s)}{(k_s + 2k_f) + \varphi(k_f - k_s)},$$

where  $\varphi$  is the nanoparticle volume fraction,  $(\rho C_p)_{nf}$  is the heat capacity of the nanofluid,  $k_{nf}$  is the thermal conductivity of the nanofluid,  $k_f$  and  $k_s$  are the thermal conductivities of the fluid and the solid fractions, respectively, and  $\rho_f$  and  $\rho_s$  are the densities of the fluid and the solid fractions, respectively. It should be mentioned that the use of the above expression for  $k_{nf}$  is restricted to spherical nanoparticles where it does not account for other shapes of nanoparticles [2]. Also, the viscosity of the nanofluid  $\mu_{nf}$  has been approximated by Brinkman [33] as viscosity of a base fluid  $\mu_f$  containing dilute suspension of fine spherical particles.

Further, we introduce the boundary layer variables, which are defined as

$$\begin{aligned} x &= \bar{x}/L, \quad y = Re^{1/2}(\bar{y}/L), \quad u = \bar{u}/U, \\ v &= Re^{1/2}(\bar{v}/L), \quad u_e = \bar{u}_e/U, \\ \theta &= (T - T_\infty)/(T_w - T_\infty), \\ p &= (\bar{p} - p_\infty)/(\rho_f U^2), \quad u_w = \bar{u}_w/U, \end{aligned} \quad (7)$$

where  $L$  is a characteristic length of the plate,  $p_\infty$  is the pressure of the ambient nanofluid and  $Re = UL/\nu_f$  is the Reynolds number with  $\nu_f$  being the kinematic viscosity of the nanofluid. Substituting Eq. (7) into Eqs. (1)–(4) and taking into account the boundary layer approximations, and the fact that the present is a flow under zero pressure gradient, we obtain the following dimensionless boundary layer equations

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0, \quad (8)$$

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = \frac{\mu_{nf}}{\rho_{nf} \nu_f} \frac{\partial^2 u}{\partial y^2}, \quad (9)$$

$$u \frac{\partial \theta}{\partial x} + v \frac{\partial \theta}{\partial y} = \frac{\alpha_{nf}}{\nu_f} \frac{\partial^2 \theta}{\partial y^2}, \quad (10)$$

and the boundary condition equation (5) become

$$\begin{aligned} u = u_w = \lambda, \quad v = v_w, \quad \theta = 1, \quad \text{at } y = 0, \\ u = u_e = 1, \quad \theta = 0, \quad \text{as } y \rightarrow \infty. \end{aligned} \quad (11)$$

It should also be mentioned that  $v_w < 0$  is for suction,  $v_w > 0$  is for injection and  $v_w = 0$  is for impermeable surface.

We look for a similarity solution of Eqs. (8)–(11) of the following form

$$\eta = y/(2x)^{1/2}, \quad f(\eta) = \psi/(2x)^{1/2}, \quad g(\eta) = \theta, \quad (12)$$

where  $\psi$  is the stream function and is defined in the usually way as  $u = \partial\psi/\partial y$  and  $v = -\partial\psi/\partial x$ , which identically satisfies Eq. (8). In order that similarity solutions of Eqs. (8)–(11) exist, we take

$$v_w(x) = -\frac{f_0}{(2x)^{1/2}}, \tag{13}$$

where  $f_0 = f(0)$  is a non-dimensional constant which determines the transpiration rate, with  $f_0 > 0$  for suction,  $f_0 < 0$  for injection and  $f_0 = 0$  for impermeable surface. It is worth mentioning that  $x > 0$  in Eqs. (12) and (13), since the boundary layer does not start at the leading edge  $x = 0$ , but somewhere upstream of the plate  $x > 0$  [34, 35]. Using Eqs. (12) and (13), Eqs. (9) and (10) are reduced to the following ordinary differential equations

$$\frac{f'''}{(1 - \varphi)^{2.5}[1 - \varphi + \varphi(\rho_s/\rho_f)]} + ff'' = 0, \tag{14}$$

$$\frac{1}{Pr} \frac{g''k_{nf}/k_f}{[1 - \varphi + \varphi(\rho C_p)_s/(\rho C_p)_f]} + fg' = 0, \tag{15}$$

where prime denotes differentiation with respect to  $\eta$  and  $Pr = \nu_f/\alpha_f$  is the Prandtl number. The boundary conditions (11) become

$$\begin{aligned} f(0) &= f_0, & f'(0) &= \lambda, & g(0) &= 1, \\ f'(\eta) &= 1, & g(\eta) &= 0, & \text{as } \eta &\rightarrow \infty. \end{aligned} \tag{16}$$

The physical quantities of interest are the skin friction coefficient and the Nusselt number, which are, respectively, defined as

$$C_f = \frac{\tau_w}{\rho_f u_w^2}, \quad Nu = \frac{Lq_w}{k_f(T_w - T_\infty)}, \tag{17}$$

where  $\tau_w$  is the surface shear stress and  $q_w$  is the surface heat flux, which are given by

$$\tau_w = \mu_{nf} \left( \frac{\partial \bar{u}}{\partial \bar{y}} \right)_{\bar{y}=0}, \quad q_w = -k_{nf} \left( \frac{\partial T}{\partial \bar{y}} \right)_{\bar{y}=0}. \tag{18}$$

Substituting Eqs. (7) and (12) into Eq. (17) and using Eq. (18), we get

$$(2Re_x)^{1/2} C_f = \frac{f''(0)}{(1 - \varphi)^{2.5}}, \tag{19}$$

$$(2/Re_x)^{1/2} Nu = -\frac{k_{nf}}{k_f} g'(0).$$

Results for  $f_0 = 0$  can be compared with those reported by Rohni et al. [19].

### 3 Results and discussion

Numerical solutions to the nonlinear ordinary differential equations (14) and (15) with the boundary conditions (16) were obtained using the Runge–Kutta–Fehlberg method with shooting technique. This method has been successfully used by the present authors to study various boundary value prob-

lems (see for example Ishak et al. [36,37]). We find the missing slopes  $f''(0)$  and  $g'(0)$ , for some values of the governing parameters, namely the nanoparticle volume fraction  $\varphi$ , the moving parameter  $\lambda$  and the suction/injection parameter  $f_0$ . Three types of nanoparticles were considered, namely, copper Cu, alumina  $Al_2O_3$ , and titania  $TiO_2$ . Following Oztop and Abu–Nada [12], the value of Prandtl number  $Pr$  is taken as 6.2 (for water) and the volume fraction of nanoparticles is from 0 to 0.2 ( $0 \leq \varphi \leq 0.2$ ) in which  $\varphi = 0$  corresponds to the regular Newtonian fluid. It is worth mentioning that we have used data related to thermophysical properties of the fluid and nanoparticles as listed in Table 1 [12] to compute each case of the nanofluid. The numerical results are summarized in Table 2 and Figs. 1 to 10.


**Table 1** Thermophysical properties of fluid and nanoparticles (Oztop and Abu–Nada [12])

Physical properties	Fluid phase (water)	Cu	$Al_2O_3$	$TiO_2$
$C_p/(J \cdot kg^{-1} \cdot K^{-1})$	4 179	385	765	686.2
$\rho/(kg \cdot m^{-3})$	997.1	8 933	3 970	4 250
$k/(W \cdot m^{-1} \cdot K^{-1})$	0.613	400	40	8.953 8


**Table 2** Values of  $\lambda_c$  for different nanoparticles and different values of  $f_0$  when  $Pr = 6.2$  and  $\varphi = 0.1$

Nanoparticles	$f_0$	Rohni et al. [22]	Present
Cu	–0.3		–0.165 7
	0	–0.354 1	–0.354 1
	0.3		–0.599 7
$Al_2O_3$	–0.3		–0.190 3
	0	–0.354 1	–0.354 1
	0.3		–0.559 2
$TiO_2$	–0.3		–0.188 7
	0	–0.354 1	–0.354 1
	0.3		–0.561 7


Figures 1 and 2 show the variation of  $f''(0)$  and  $-g'(0)$  with  $\lambda$  for Cu–water nanofluid and different values of  $f_0$  when  $Pr = 6.2$  and  $\varphi = 0.1$ . It is seen that the solution is unique when  $\lambda \geq 0$ , while dual solutions are found to exist when  $\lambda < 0$ , i.e. when the plate and the free stream move in the opposite directions. The values of  $f''(0)$  are positive when  $\lambda < 1$ , and they become negatives when the value of  $\lambda$  exceeds 1, for all values of the suction/injection parameter  $f_0$ . Physically, positive value of  $f''(0)$  means that the fluid exerts a drag force on the plate, and negative value means the opposite. The zero value of  $f''(0)$  when  $\lambda = 1$  does not mean separation, but it corresponds to the equal velocity of the plate and the free stream. Figures 1 to 6 also show that

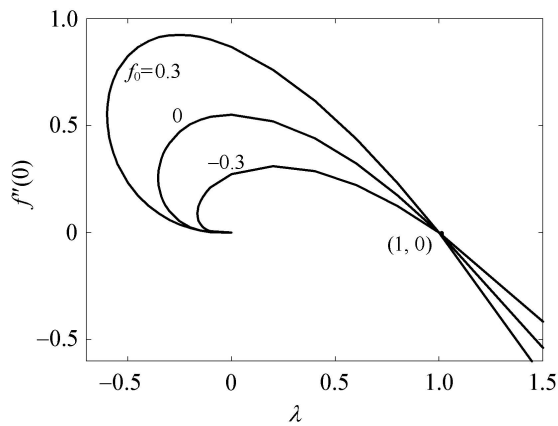


**Fig. 1** Variation of  $f''(0)$  with  $\lambda$  for Cu-water nanofluid and different values of  $f_0$  when  $Pr = 6.2$  and  $\varphi = 0.1$

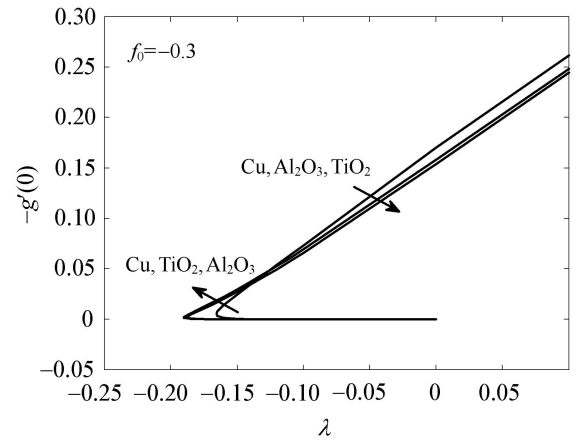


**Fig. 4** Variation of  $-g'(0)$  with  $\lambda$  for different nanoparticles when  $f_0 = -0.3$ ,  $Pr = 6.2$  and  $\varphi = 0.1$

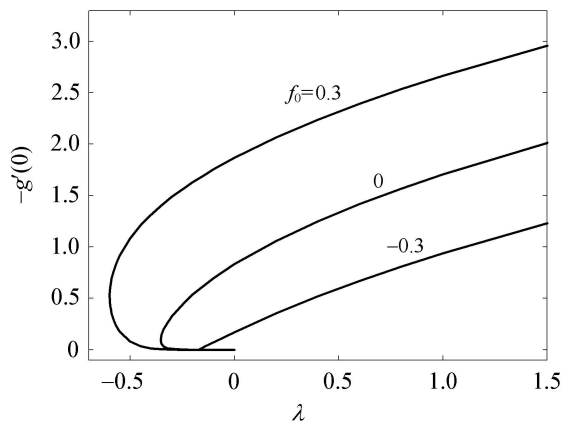


**Fig. 2** Variation of  $-g'(0)$  with  $\lambda$  for Cu-water nanofluid and different values of  $f_0$  when  $Pr = 6.2$  and  $\varphi = 0.1$

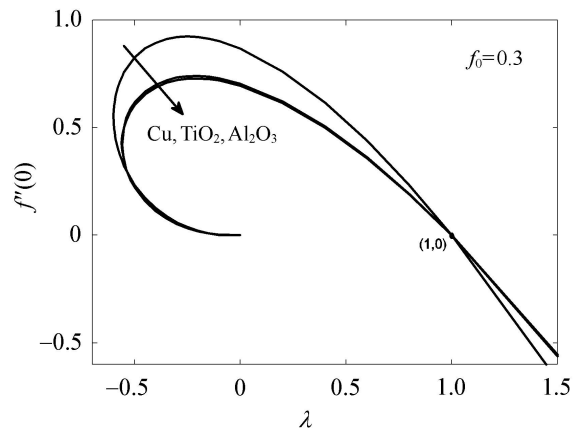

**Fig. 5** Variation of  $f''(0)$  with  $\lambda$  for different nanoparticles when  $f_0 = 0.3$ ,  $Pr = 6.2$  and  $\varphi = 0.1$

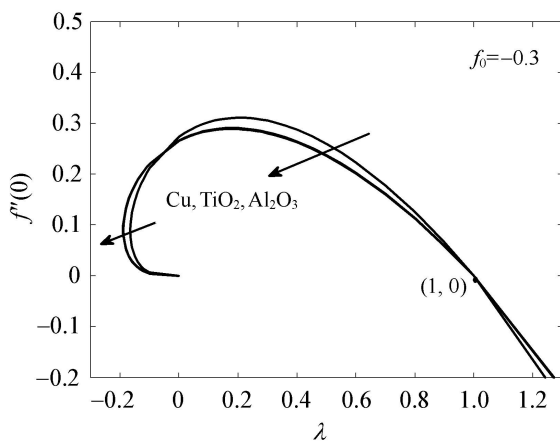


**Fig. 3** Variation of  $f''(0)$  with  $\lambda$  for different nanoparticles when  $f_0 = -0.3$ ,  $Pr = 6.2$  and  $\varphi = 0.1$

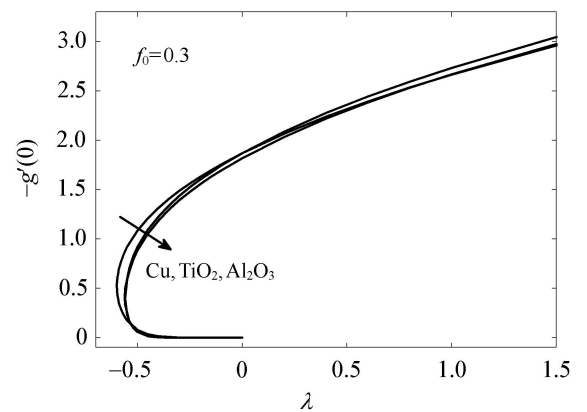


**Fig. 6** Variation of  $-g'(0)$  with  $\lambda$  for different nanoparticles when  $f_0 = 0.3$ ,  $Pr = 6.2$  and  $\varphi = 0.1$

for a particular value of  $f_0$ , the solution exists up to a certain critical value of  $\lambda$ , say  $\lambda_c$ . Beyond this value, the boundary layer approximations breakdown, and thus the numerical solution can not be obtained. The boundary layer separates from the surface at  $\lambda = \lambda_c$ , where  $\lambda_c$  denotes a critical value of  $\lambda$ . Based on our computations, the critical value of  $\lambda$ , say  $\lambda_c$  are presented in Table 2, which show a favorable agreement with previous investigations for the case  $f_0 = 0$ . Moreover, from Table 2, we found that for all nanoparticles the values of  $|\lambda_c|$  increase as  $f_0$  increases. Hence, suction delays the boundary layer separation, while injection accelerates it.

Figures 7 and 8 illustrate the variations of the skin friction coefficient and the local Nusselt number, given by Eq. (19) with the nanoparticle volume fraction parameter  $\varphi$  for three different nanoparticles: copper Cu, alumina  $Al_2O_3$ , and titania  $TiO_2$  with different values of  $f_0$ . One can see that these quantities increase almost monotonically with increasing  $\varphi$ . In addition, it is noted that the lowest heat transfer rate is obtained for nanoparticles  $TiO_2$  due to domination of conduction mode of heat transfer. This is because  $TiO_2$  has the lowest value of thermal conductivity compared to Cu and  $Al_2O_3$ , as can be seen from Table 1. This behavior of local Nusselt number is similar to that reported by Oztop and Abu-Nada [12]. However, the difference in the values for Cu and  $Al_2O_3$  is negligible. The thermal conductivity of  $Al_2O_3$  is approximately one tenth for Cu, as given in Table 1. However, a unique property of  $Al_2O_3$  is its low thermal diffusivity. The reduced value of thermal diffusivity leads to higher temperature gradients and, therefore, higher enhancement in heat transfer. The Cu nanoparticles have high values of thermal diffusivity and, therefore, which reduces the temperature gradients and therefore affect the performance of Cu nanoparticles. As volume fraction of nanoparticles increases, the local Nusselt number becomes larger especially in the case of suction. The highest heat transfer rate is recorded for Cu-nanofluid for both cases, suction and injection.

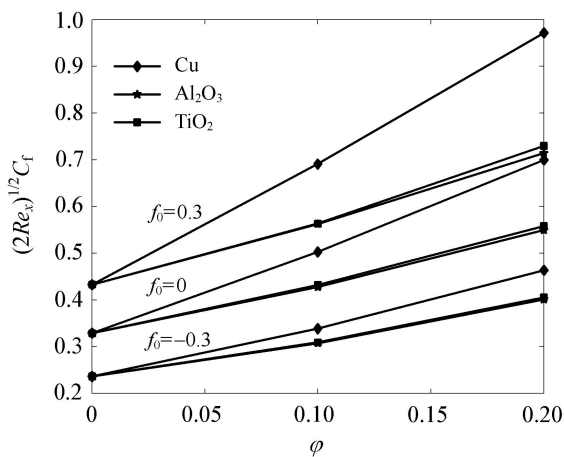


**Fig. 7** Variation of skin friction coefficient with  $\varphi$  for different nanoparticles and  $f_0$  when  $Pr = 6.2$  and  $\lambda = 0.5$

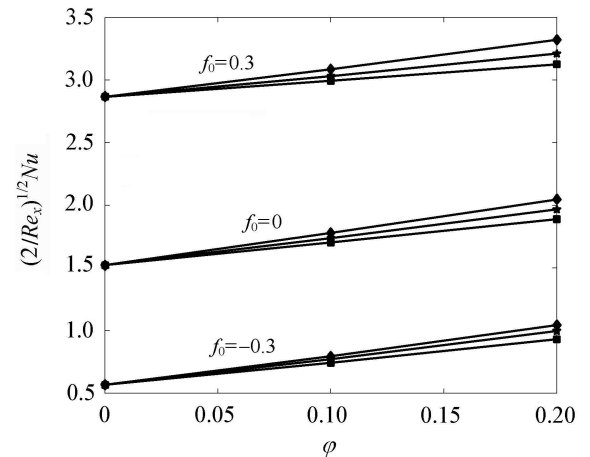


**Fig. 8** Variation of the local Nusselt number with  $\varphi$  for different nanoparticles and  $f_0$  when  $Pr = 6.2$  and  $\lambda = 0.5$

Figures 9 and 10 present the velocity profile  $f'(\eta)$  and the temperature profile  $g(\eta)$  for Cu-water nanofluid and various values of  $f_0$  when  $Pr = 6.2$  and  $\lambda = -0.1$ . It is seen that all these profiles satisfied asymptotically the far field boundary conditions equation (16). In these figures the solid lines and the dash lines are for the upper and lower branch solutions, respectively. These velocity and temperature profiles support the existence of dual nature of solutions presented in Figs. 1 and 2. The velocity profiles for the upper and lower branch solutions when  $\lambda = -0.1$  (Fig. 9) show that, the velocity gradient at the surface is positive, which produces positive value of the skin friction coefficient. The temperature gradient at the surface as shown in Fig. 10 is in agreement with the curves of  $-g'(0)$  shown in Fig. 2.

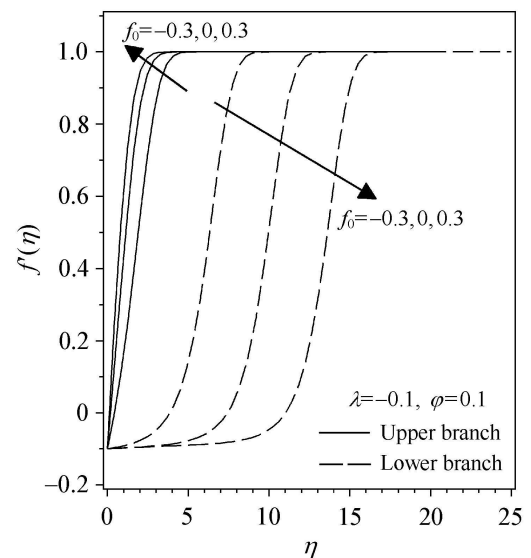

**Fig. 9** Velocity profiles for Cu-water nanofluid and different values of  $f_0$  when  $Pr = 6.2$  and  $\lambda = -0.1$

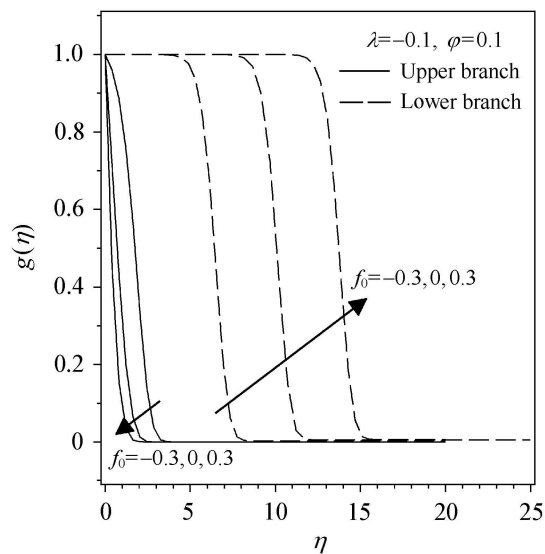

**Fig. 10** Temperature profiles for Cu-water nanofluid and different values of  $f_0$  when  $Pr = 6.2$  and  $\lambda = -0.1$

#### 4 Conclusions

We have theoretically studied the existence of dual similarity solutions in boundary layer flow over a moving surface immersed in a nanofluid with suction and injection effects. The governing boundary layer equations were solved numerically using the Runge–Kutta–Fehlberg method with shooting technique. Discussion were carried out for the effects of suction/injection parameter  $f_0$ , the nanoparticle volume fraction  $\varphi$  and the moving parameter  $\lambda$  on the skin friction coefficient  $f''(0)$  and the local Nusselt number  $-g'(0)$ . It was found that dual solutions exist when the plate and the free stream move in the opposite directions. It was also shown that introducing suction is to increase the range of  $\lambda$  for which the solution exists, and in consequence delays the boundary layer separation, while it was found that injection acts in the opposite manner.

**Acknowledgements** This work was supported by a research grant from the Universiti Kebangsaan Malaysia (Project Code: UKM-GGPM-NBT-080-2010). The authors thank the anonymous reviewers for their valuable comments which led to the improvement of this paper.

#### References

- Choi, S.U.S.: Enhancing thermal conductivity of fluids with nanoparticles. In: Siginer, D.A., Wang, H.P. eds. *Developments and Applications of Non-Newtonian Flows*. FED-vol.231 **66**, 99–105 (1995)
- Abu-Nada, E.: Application of nanofluids for heat transfer enhancement of separated flow encountered in a backward facing step. *Int. J. Heat Fluid Flow* **29**, 242–249 (2008)
- Abu-Nada, E., Oztop, H.F.: Effect of inclination angle on natural convection in enclosures filled with Cu-water nanofluid. *Int. J. Heat Fluid Flow* **30**, 669–678 (2009)
- Bachok, N., Ishak, A., Pop, I.: Boundary layer flow of nanofluids over a moving surface in a flowing fluid. *Int. J. Thermal Sci.* **49**, 1663–1668 (2010)
- Bachok, N., Ishak, A., Pop, I.: Flow and heat transfer at a general three-dimensional stagnation point in a nanofluid. *Physica B* **405**, 4914–4918 (2010)
- Bachok, N., Ishak, A., Pop, I.: Flow and heat transfer over a rotating porous disk in a nanofluid. *Physica B* **406**, 1767–1772 (2011)
- Yacob, N.A., Ishak, A., Pop, I.: Falkner-Skan problem for a static or moving wedge in nanofluids. *Int. J. Thermal Sci.* **50**, 133–139 (2011)
- Buongiorno, J.: Convective transport in nanofluids. *ASME J. Heat Transfer* **128**, 240–250 (2006)
- Kuznetsov, A.V., Nield, D.A.: Natural convective boundary layer flow of a nanofluid past a vertical plate. *Int. J. Thermal Sci.* **49**, 243–247 (2010)
- Lotfi, R., Saboohi, Y., Rashidi, A.M.: Numerical study of forced convective heat transfer of nanofluids: comparison of difference approaches. *Int. Comm. Heat Mass Transfer* **37**, 74–78 (2010)
- Nield, D.A., Kuznetsov, A.V.: The Cheng-Minkowycz problem for natural convective boundary layer flow in a porous medium saturated by a nanofluid. *Int. J. Heat Mass Transfer* **52**, 5792–5795 (2009)
- Oztop, H.F., Abu-Nada, E.: Numerical study of natural convection in partially heated rectangular enclosures filled with nanofluids. *Int. J. Heat Mass Transfer* **29**, 1326–1336 (2008)
- Tiwari, R.K., Das, M.K.: Heat transfer augmentation in a two-sided lid-driven differentially heated square cavity utilizing nanofluids. *Int. J. Heat Mass Transfer* **50**, 2002–2018 (2007)
- Das S.K., Choi S.U.S., Yu W., et al.: *Nanofluids: Science and Technology*. Wiley, New Jersey (2007)
- Buongiorno J.: Convective transport in nanofluids. *ASME J. Heat Transfer* **128**, 240–250 (2006)
- Daunghongsuk W., Wongwises S.: A critical review of convective heat transfer nanofluids. *Renew. Sustain. Eng. Rev.* **11**, 797–817 (2007)
- Trisaksri V., Wongwises, S.: Critical review of heat transfer characteristics of nanofluids. *Renew. Sustain. Energy Rev.* **11**, 512–523 (2007)
- Wang X.-Q., Mujumdar A.S.: Heat transfer characteristics of nanofluids: a review. *Int. J. Thermal Sci.* **46**, 1–19 (2007)
- Wang X.-Q., Mujumdar A.S.: A review on nanofluids—Part I: theoretical and numerical investigations. *Brazilian J. Chem. Eng.* **25**, 613–630 (2008)
- Wang X.-Q., Mujumdar A.S.: A review on nanofluids—Part II: experiments and applications. *Brazilian J. Chem. Eng.* **25**, 631–648 (2008)
- Kakaç S., Pramuanjaroenkij, A.: Review of convective heat transfer enhancement with nanofluids. *Int. J. Heat Mass Transfer* **52**, 3187–3196 (2009)
- Rohani, A.M., Ahmad, S., Pop, I.: Boundary layer flow over a moving surface in a nanofluid beneath a uniform free stream.

- Int. J. Numerical Methods for Heat and Fluid Flow **21**(7), 828–846 (2010)
- 23 Al-Sanea, S.A.: Mixed convection heat transfer along a continuously moving heated vertical plate with suction or injection. *Int. J. Heat Mass Transf.* **47**, 1445–1465 (2004)
- 24 Chaudhary, M.A., Merkin, J.H.: The effect of blowing and suction on free convection boundary layers on vertical surface with prescribed heat flux. *J. Eng. Math.* **27**, 265–292 (1993)
- 25 Merkin, J.H.: A note on the similarity equations arising in free convection boundary layers with blowing and suction. *J. Appl. Math. Phys. (ZAMP)* **45**, 258–274 (1994)
- 26 Weidman, P.D., Kubitschek, D.G., Davis, A.M.J.: The effect of transpiration on self-similar boundary layer flow over moving surfaces. *Int. J. Eng. Sci.* **44**, 730–737 (2006)
- 27 Ishak, A., Nazar, R., Pop, I.: Boundary layer on a moving wall with suction and injection. *Chin. Phys. Lett.* **24**, 2274–2276 (2007)
- 28 Zheng, L., Wang, L., Zhang, X.: Analytic solutions of unsteady boundary flow and heat transfer on a permeable stretching sheet with non-uniform heat source/sink. *Commun. Nonlinear Sci. Numer. Simulat.* **16**, 731–740 (2011)
- 29 Zhu, J., Zheng, L., Zhang, X.: Homotopy analysis method for hydromagnetic plane and axisymmetric stagnation-point flow with velocity slip. *World Academy Sci. Eng. Tech.* **63**, 151–155 (2010)
- 30 Zhu, J., Zheng, L., Zhang, X.: The effect of the slip condition on the MHD stagnation-point over a power-law stretching sheet. *Appl. Math. Mech. Engl. Ed.* **31**, 439–448 (2010)
- 31 Bachok, N., Ishak, A.: The effects of suction and injection on a moving flat plate in a parallel stream with prescribed surface heat flux. *WSEAS Trans. Heat Mass Transf.* **5**, 73–82 (2010)
- 32 Bachok, N., Ishak, A., Pop, I.: Mixed convection boundary layer flow over a permeable vertical plate embedded in an anisotropic porous medium. *Math. Prob. Eng.* **2010**, 659023 (2010)
- 33 Brinkman, H.C.: The viscosity of concentrated suspensions and solutions. *J. Chem. Phys.* **20**, 571–581 (1952)
- 34 Schlichting, H.S., Gersten K.: *Boundary-Layer Theory*. Springer, New York (2000)
- 35 Martynenko O.G., Khramtsov, P.P.: *Free-Convective Heat Transfer*. Springer, Berlin (2005)
- 36 Ishak, A., Nazar, R., Bachok, N., et al.: Melting heat transfer in steady laminar flow over a moving surface. *Heat Mass Transf.* **46**, 463–468 (2010)
- 37 Ishak, A., Yacob, N.A., Bachok, N.: Radiation effects on the thermal boundary layer flow over a moving plate with convective boundary condition. *Meccanica* **46**, 795–801 (2011) DOI: 10.1007/s11012-010-9338-4