

Effect of *Chytriomycetes hyalinus* on Industrial Wastewater Pre-Treated with Electrocoagulations in a Continuous System

Moisés Tejocote-Pérez^{1,2}, Patricia Balderas-Hernández¹, Carlos Barrera-Díaz¹, Gabriela Roa-Morales¹, Victor Bárcena²

¹Sustainable Chemistry Research Center, State of Mexico Autonomy University and Mexico Autonomy National University (UAEM-UNAM), Toluca, Mexico; ²Sciences Faculty, State of Mexico Autonomy University, Cerrillo Campus, Toluca, Mexico.
Email: pbalderash@uaemex.mx

Received May 26th, 2012; revised June 29th, 2012; accepted July 11th, 2012

ABSTRACT

A strain of *Chytriomycetes hyalinus* fungus was applied as a pretreatment on industrial wastewater pollutant using electrocoagulations column of aluminum electrodes in a continuous system. The parameters considered in this experiment include pH, conductivity, color, turbidity, COD (Chemical Oxygen Demand), BOD (Biochemical Oxygen Demand) nitrate, nitrite, and SB (sporangia biomass). Biological and electrocoagulations treatments had the next conditions: *Chytriomycetes hyalinus* solutions 1:10, 60 min of biological treatment, 50 mL/min flow, constant ventilations, 15 min of electrocoagulations time and 3.4 A of electrical current. Color and turbidity values dropped with a 90% efficiency (2700 to 170 Pt-Co; 120 to 10 FAU, respectively), COD 68% (2100 to 672 mg/L), BOD₅ 70% (650 to 195 mg/L), nitrate showed an 86% (3.8 to 0.5 mg/L), finally nitrite with a 60% amount reduction (1.5 to 0.6 mg/L). For SB parameter, there was a value rising as same as the treatment time ($r^2 = 0.90$) carrying out a $y = 94.302e^{0.0356x}$ model. These results reveal a positive outcome of *Chytriomycetes hyalinus* on industrial wastewater pollutants pre-treated with aluminium electrocoagulations in a continuous system.

Keywords: *Chytriomycetes hyalinus*; Electrocoagulations; Industrial; Wastewater

1. Introduction

Chytriomycetes hyalinus, is a fresh water fungus which degrades organic matter as well as carbohydrates on adverse conditions of water quality [1,2]. It was unknown, until recently, how the proteolytic enzymes that allow the fungus survival in adverse conditions, remove the organic pollutants [3].



Some recordings about fungus aerobic treatments on industrial wastewater presents a 90% reduction in color, turbidity and phenols amount [4,5], an 80% in ammonia denitrification [6-8], 50% Cr (VI) loss [9] also 80 % nitrite and nitrate diminution [2]. Some fungi species such as *Aspergillus niger*, *Aspergillus oryzae*, *Penicillium corylophilum* and *Trichoderma viridae* can be used as treatments with a 50% - 80% efficiency range showing a COD decrease on industrial wastewater [10-12]. *Aspergillus oryzae* and *Rhizopus oligosporus* FBP (Fungal Biomass Protein) remove in a 75% the ammonia amount on industrial wastewater with anaerobic treatments [10].

Based on these traits, *Chytriomycetes hyalinus* can be employed as industrial wastewater biological treatment

owing to the fact that degrades soluble and colloidal organic matter. Such treatment consists in the oxidation of the organic matter by bacterial, fungus, protozoa and microalgae consortiums [7,8,13-18]. In this procedure the microorganisms reduce the COD and BOD [19,20].

In many cases, industrial wastewater inhibit the degradation ability of the biological treatments probably due to its effluent character that commonly contains several organic and inorganic pollutants such as phenols, solvents, aromatics, organic matter, metals, dyes, nitrate, nitrite, chloride and salts [6,7,21-24]. In order to solve this problem and increase the efficiency, some authors coupled them with ozono, photocatalysis [4] filtrations [22], Fenton reactions [25,26], chemical coagulants [27, 28] and lastly Fe and Al electrocoagulation [25,29,30]. Electrocoagulations consists in the formation of metallic hydroxide such as Fe(OH)₂ and Al(OH)₃ within wastewater by electrodisolution of a soluble anode, this method frequently uses electrodes made of iron (Fe) or aluminum (Al); four phases can be observed: firstly an electrolytic reaction at electrode surfaces, secondly the formation of coagulants in the aqueous phase, then the

adsorption of soluble or colloidal pollutants on metallic coagulants, and finally the removal by sedimentation or flotation [25,31,32]. The reactions to aluminum electrodes are shown next:



The Al(aq)^{3+} and OH^- ions are generated by an anode (1) and a cathode (2) form several monomeric species previous to Al(OH)_3 coagulant (3) which oxidizes the pollutants and remove them by sedimentation [25], in this process the electrocoagulant Al(OH)_3 increases the wastewater pollutant bioavailability to the biological treatments [33].

Lately, the electrochemical treatment of wastewater applies a continuous systems since the procedure increases the wastewater pollutants bioavailability and operate with dynamic treatment plants parameters such as flows, ventilations, hydraulic and organic charge, liquor mix and resident times [14,19,20,34,35].

Due to the bioavailability increment of the industrial wastewater pollutants to biological treatments by electrocoagulations was noticed. The present work evaluates the effect of *Chytriomycetes hyalinus*, whose has not been used as biological treatment for industrial effluents, on industrial wastewater pre-treated with aluminum electrodes in a continuous system.

2. Materials and Methods

2.1. Wastewater Samples

The industrial wastewater was collected in an industrial treatment plant in México State; 10 L samples of water were taken prior to the primary clarifiers every month during March-November 2011. The samples were trans-

ported in 10 L plastic containers and stored to 4° for 24 hrs following the Mexican [36] and International [37] normative.

2.2. *Chytriomycetes hyalinus* and Electrocoagulations Pretreatment in a Continuous System

The continuous system applied to evaluate the effects of *Chytriomycetes hyalinus* on electrocoagulation pre-treated industrial wastewater, shown in **Figure 1**, are based on [35] and [33] systems. The continuous system contains an electrocoagulation column coupled with a *Chytriomycetes hyalinus* aerobic biological reactor.

2.2.1. Electrocoagulations Reactor

The electrocoagulation reactor contains four circular aluminum electrodes arranged vertically into an 11 × 20 cm column, the electrodes area is 63.61 cm² and 0.05 A/cm² of current density. The system operates with 1 L of wastewater volume, a peristaltic pump, constant flow of 50 ml/min, 3.4 A of electrical current, 2.0 psi of ventilations, temperature of 19°C and 15 min of electrochemical pretreatment [29,33].

2.2.2. Biological Reactor with *Chytriomycetes hyalinus*

Chytriomycetes hyalinus strain was obtained from isolations made to freshwater samples, which were taken from a water body near to Lerma River in Mexico State. Five *Chytriomycetes hyalinus* isolations were made in aseptic conditions using queratine extract medium (KEM) containing 100 mL of queratine liquid extract, 0.5 g NaCl, 0.2 g MgCl, 0.05 g glucose and 1000 mL distilled water. The isolations were incubated up to seven days maintaining 20°C. The biomass of *Chytriomycetes hyalinus* developed around organic matter flocks in the aseptic medium was

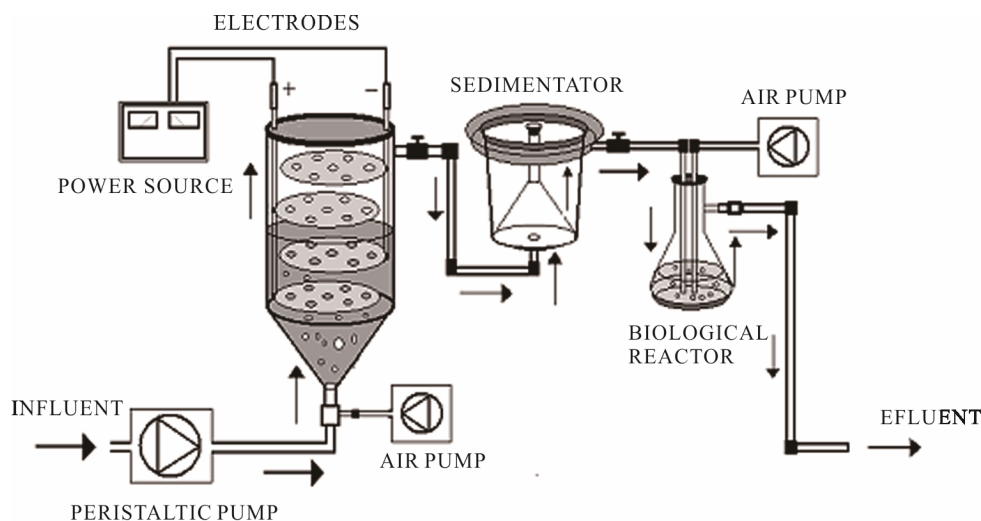


Figure 1. Electrocoagulations-*Chytriomycetes hyalinus* continuous system.

removed by aseptic vacuum filtrations using filter paper Whatman 4, after that the filtering obtained was inoculated in the biological reactor, described in the **Figure 1**, with 1:1 concentrations of *Chytriomycetes hyalinus* strains and sterile distilled water, this activated sludge was maintained with 2.0 psi of ventilation during 8 hrs previous to electrocoagulation pre-treatment [24,38].

The electrocoagulation wastewater pre-treatment was conducted to *Chytriomycetes hyalinus* biological reactor by peristaltic pump, **Figure 1**. The biological reactor was operated with 2.0 psi of ventilations, temperature of 19°C, and constant flow of 50 ml/min and 60 min of biological treatment.

The *Chytriomycetes hyalinus* strain was characterized utilizing an optical microscopic considering the morphology and sporangia biomass (SB) using KOH 5%, congo red as biological dye and a Leica microscope GME model, the SB in activated sludge and liquor mix was 345 sporangia/mL, this obtained using a Marienfeld Neubauer chamber [39]. The industrial pollutants toxic effects in the biological treatment was evaluated with the SB (sporangia number/mL of liquor mix) during the biological treatment as well [24,39].

2.3. Wastewater Characterizations

Wastewater was characterizes using pH, conductivity, color, turbidity, BOD₅, COD, nitrate and nitrite parameters according to the Mexican [36,40,41] and International [37] normative.

2.4. pH and Conductivity

Conductivity and pH were measured directly on wastewater before and after electrochemical and biological treatments using an OAKTON potentiometer 35631-60 model with standard calibration solutions [37,42].

2.5. Color and Turbidity

The color and turbidity was evaluated directly on wastewater previous and subsequent to electrochemical and biological treatments applying the standard scale color method of platinum-cobalt (Pt-Co) with a range from 0 to 500 units Pt-Co and the turbidity FAU units' method with a range from 0 to 5000 units. The reads from both methods were made using a Hach spectrophotometer DR/4000U model with 465 and 860 nm wavelength respectively [37,42].

2.6. COD and BOD₅

The COD parameter was used to evaluate the amount of organic and inorganic pollutants oxidized by chemical digest with chromic and sulfuric acids in potassium dichromate solutions, the digest was regulated in a ther-

moreactor Thermo Elec Corp COD Orion model from 125°C to 150°C, the reaction was maintained during 2hrs, eventually the evaluations were expressed in mg/L units by a Hach spectrophotometer DR/4000U model, The BOD₅ test was employed to evaluate the oxygen amount needed by microorganisms to oxidize the organic matter during five days of incubation to 20°C, this test was made using BOD₅ Hach bottles kit, a dissolved oxygen meter OAKTON DO 110 model and a incubator VWR Scientific 1535 model [37,42].

2.7. Nitrate and Nitrite

The nitrates and nitrites were quantified before and after the electrochemical and biological treatments, such quantifications were made using the Nitraver[®] X and Nitraver[®] 3 methods of Hach besides the values were determinate by a spectrophotometer Hach DR/4000U. These quantifications were made according to the normative [37,42].

2.8. UV-Visible Spectrophotometer

Some water samples previous and behind electrochemical-biological treatments were analyzed by spectrophotometer UV-visible Perkin Elmer Lambda 25 model (200 - 900 nm) this technique is necessary to identify the behavior of some organic pollutants considering their absorption properties [32].

3. Results and Discussions

3.1. Parameters

The pH, conductivity, color, turbidity, COD, BOD₅, nitrate and nitrite values of industrial wastewater before and after continuous coupled systems are shown in **Table 1**.

3.1.1. pH and Conductivity

The pH value intensified from 7.45 ± 0.84 to 8.45 ± 0.50 in consequence of continuous system, this behavior is shown in **Figure 2(a)**. The pH boosted as a result of the OH⁻ radicals production on cathode surfaces from aluminum electrodes into the electrochemical column and the OH⁻ radicals electrodisolution in the aluminum hydroxide Al(OH)₃ reactions. The pH values before and after the treatment corresponding to common industrial wastewater with 7.0 and 9.0 values is a beneficial condition to be applied in the electrochemical and biological treatments [33].

The **Figure 2(b)** divulge the conductivity abate form 6.7 ± 0.44 to 4.57 ± 0.30 mS, this tendency is caused by Cl⁻ as well as chlorides salts consumption in electrocoagulation redox reactions [25,29,32].

The conductivity values indicate a beneficial condition

applying only 15 min electrochemical pulse in the coupled treatment. Furthermore there is a gain in the pollutants bioavailability to *Chytriomycetes hyalinus* [14,19,20,33-35].

3.1.2. Color and Turbidity

The color displays high values in wastewater samples earlier from the coupled treatment; additionally it was produced by dissolved organic matter from chemical and food industries effluents [29]. Literature points *Aspergillus* and *Penicillium* as color discharge up to 90% in coupled systems, for these experiment **Figure 2(c)** shows a 93% color removal using *Chytriomycetes hyalinus*, a 50% more efficient than conventional activated sludge

[4,5,10,30,32]. It is to say that electrochemical pre-treatment enhance the industrial pollutant bioavailability to *Chytriomycetes hyalinus*.

As perceived in **Figure 2(c)**, the turbidity had a similar behavior pointing that the values diminish from 120 to 10 FAU with 91% efficiency after using *Chytriomycetes hyalinus* electrocoagulation system. Thus only with *Chytriomycetes hyalinus* the efficiency rate was higher than 60% reported to conventional biological treatment for activated sludge [4,5,10,30,32].

Both, color and turbidity parameters register a shrinks after a 15-min of biological treatment, meaning that the pollutant bioavailability improves in coupled condition of continuous system.

Table 1. Values of pH, conductivity, color, turbidity, COD, BOD₅, nitrate and nitrites before and after the electrocoagulations-*Chytriomycetes hyalinus* treatment.

	pH	Conductivity (mS)	Color (Pt-Co)	Turbidity (FAU)	COD (mg/L)	BOD ₅ (mg/L)	Nitrate (mg/L)	Nitrite (mg/L)
Before	7.45 ± 0.84	6.7 ± 0.44	2700 ± 51.43	120 ± 19.30	2100 ± 42.86	650 ± 23.12	3.8 ± 0.41	1.5 ± 0.22
After	8.45 ± 0.50	4.57 ± 0.30	170 ± 2.0	10 ± 1.2	672 ± 10.6	195 ± 4.1	0.5 ± 0.20	0.6 ± 0.10
%			93	91	68	70	86	60

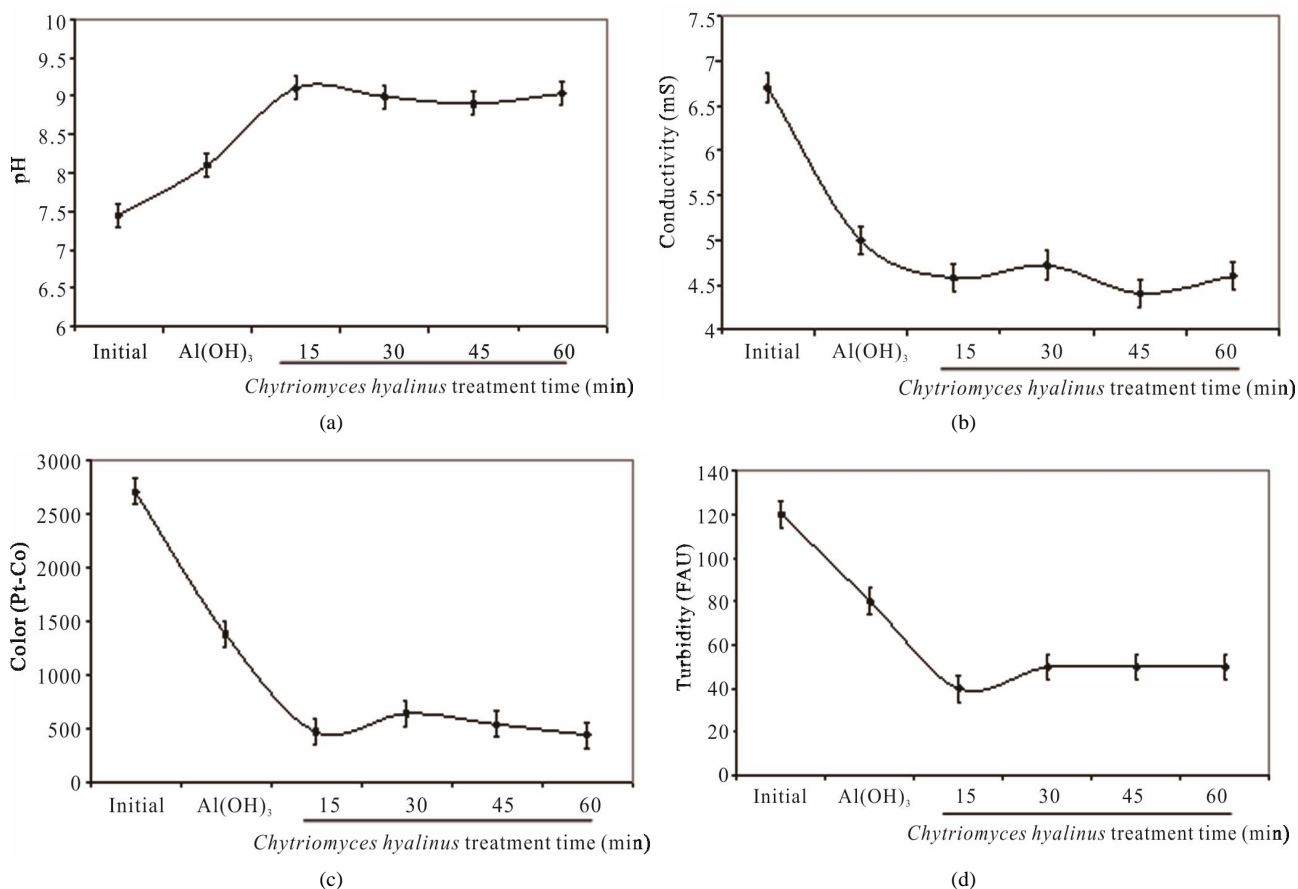


Figure 2. (a) pH; (b) Conductivity; (c) Color and (d) Turbidity during the electrochemical-*Chytriomycetes hyalinus* treatment.

3.1.3. COD and BOD₅

The COD and BOD₅ values in **Figure 3**, show a pollutant removal efficiency declining, 68% and 70%, respectively [8,11,12]. Such fact indicates that *Aspergillus niger*, *Aspergillus oryzae*, *Penicillium corylophilum* and *Trichoderma viridae* tends to contract in a 50% COD and BOD₅ levels, exposing a greater reaction rather than the one presented by reference [8,11,12].

The COD and BOD₅ results reveal three important points. In first place, *Aspergillus*, *Penicillium* and *Trichoderma* strains share a pluricellular organization while *Chytriomycetes hyalinus* posses an unicellular level, such biological advantage rises the biomass presence like the resident time during the treatment, whereas this datum represent an inconvenience for *Chytriomycetes hyalinus*. Moreover the COD and BOD₅ upshots presents the same efficiency rate; even using a lower resident time [8,11,12].

In second place, COD and BOD₅ parameters can now be considered as a new contribution to biological treatment of activated sludge since the values were lessen by using fungus strains only, while the conventional treatments of activated sludge use several microorganisms

consortiums [7,8,13-18].

In third place, it stresses the coupled continuous system role in the removal efficiency owing to the electrocoagulation conditions that raises the bioavailability of industrial wastewater pollutants to *Chytriomycetes hyalinus*. [14,19,20,25,29,33-35].

Making this study the first report of industrial pre-treated wastewater by electrocoagulation coupled with *Chytriomycetes hyalinus* as a biological system.

3.1.4. Nitrate and Nitrite

Nitrates (NO_3^-) and nitrites (NO_2^-) dwindled subsequent to the biological treatment from 3.8 to 0.5 mg/L and from 1.5 to 0.6 mg/L with an effectiveness of 86% and 60% respectively. Such behavior is displayed in **Figure 3**.

Nitrates were more affected than nitrites because its chemical nitrogen trait, having as a result a higher biological assimilation thanks to aquatic microorganisms [2,6-8].

These nitrogenous compounds, industrial pollutants type, are presented naturally in the experimental effluent, therefore it is important to make a continuous revision

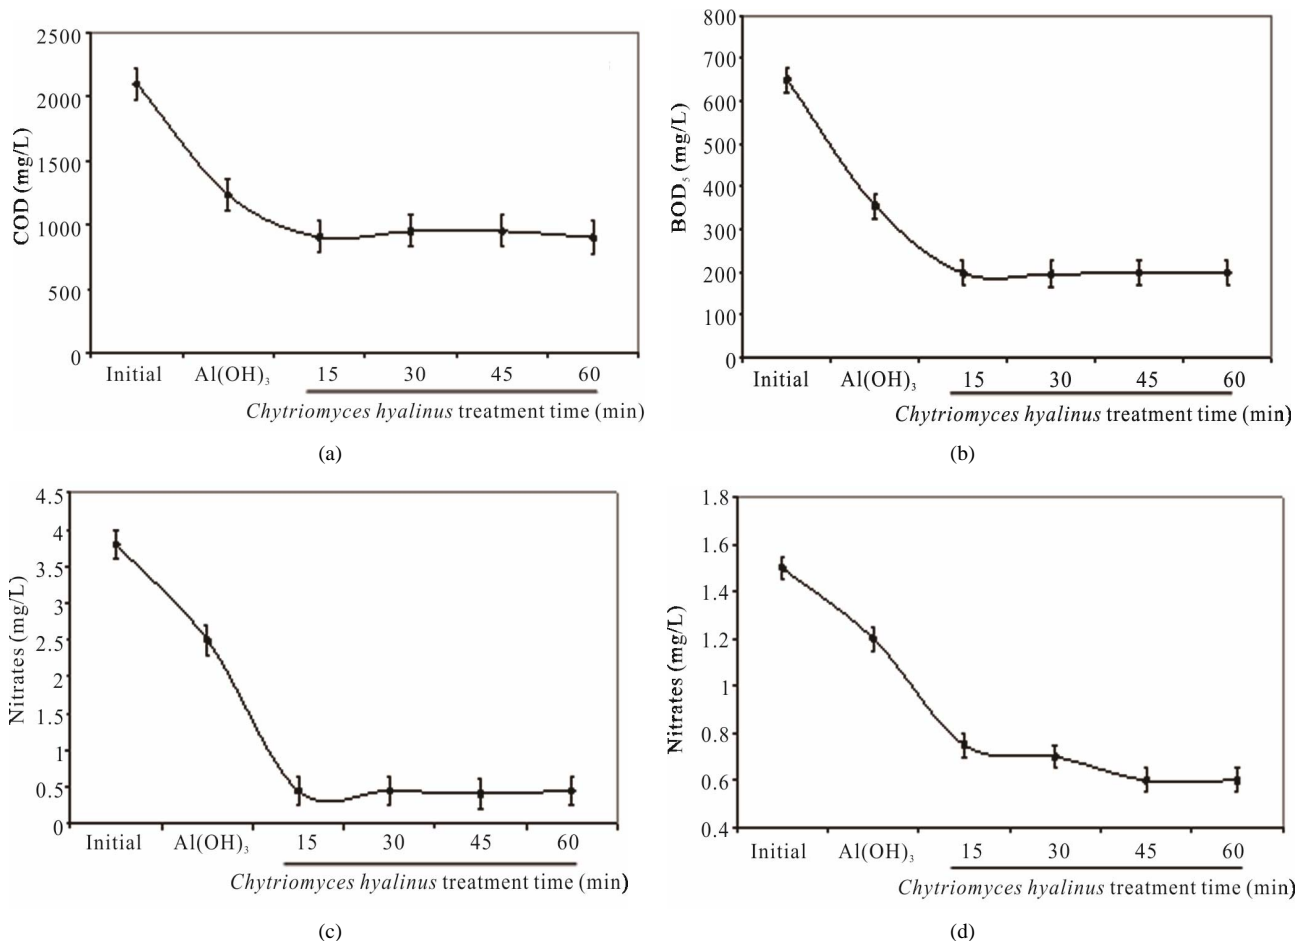


Figure 3. (a) COD, (b) BOD₅, (c) nitrates and (d) nitrites during the electrochemical-*Chytriomycetes hyalinus* treatment.

during the coupled treatment because the pollutant removal tendency in the continuous system can manifest. The nitrogenous compounds removal grew when they were oxidize, nitrates into nitrites by electrocoagulation treatments [25,31,32]. The nitrates amount and removal efficiency were higher than nitrites due to the reduction from nitrites to nitrates at the electrochemical reactor besides the quickly assimilation by *Chytriomycetes hyalinus* in the biological reactor.

This reduction is an evidence of *Chytriomycetes hyalinus* active metabolism in addition to water denitrification in aerobic conditions as its natural ability [2-4].

Similar industrial pollutant denitrification greater than 50% were reported by [6-8,10] with *Aspergillus oryzae* and *Rhizopus oligosporus*.

3.2. Sporangia Biomass (SB)

Figure 4 shows *Chytriomycetes hyalinus* SB concentrations on a 60-min session of biological treatment. The biomass suffered an increment as a result of 30 min by the time sporangia amount increased. The SB tendency indicates that *Chytriomycetes hyalinus* is capable of resisting the pollutant conditions in the liquor mix, noticed by an exponential growth $y = 94.302e^{0.0356x}$ [10,24,39].

SB value ascended when COD and BOD₅ values decrease, this reaction denotes that pollutants bioavailability to *Chytriomycetes hyalinus* were modified within a 15-min of electrochemical treatment, hence the toxic effect of industrial wastewater on biological treatment was reduced; opposite to the frequent problem in biological treatment inhibitions [6,7,21-24].

Samanthi and Chandralata (2009) report an optimal growth for *Chytriomycetes hyalinus* in some aquatic systems, showing pH values from 6.8 to 8.5, electrochemical and biological conditions in the treatment were kept into these pH values, consequently the pollutants removal suffered an increment.

The sludge amount after biological treatments with *Chytriomycetes hyalinus* was 2 g/L, within normal range from 0.5 to 5 g/L was reported in laboratory level experiments [21-24].

3.3. UV-Visible Spectrophotometer Characterizations

A pollutant decrement followed by electrocoagulations *Chytriomycetes hyalinus* system treatment can be observed in **Figure 5**. The absorbance indicates a spectral reduction with a 60% efficiency, showing an absorbance result of 400, 475 and 625 nm corresponding to phenols, solvents, aromatic and organic matter; similar wastewater spectra cases have been reported [29,32,33]. The current tendency was consistent with COD and BOD₅ results.

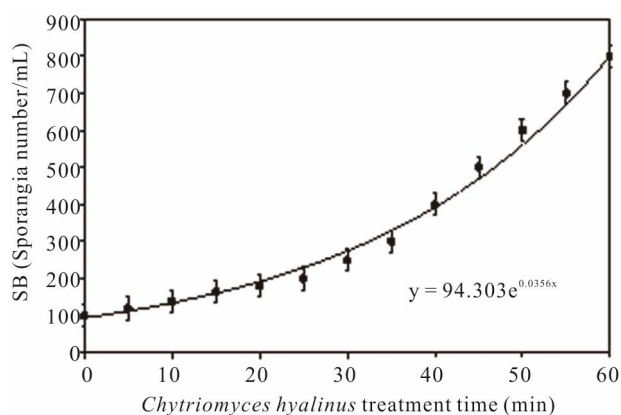


Figure 4. Sporangia biomass and *Chytridium hyalinus* treatment time.

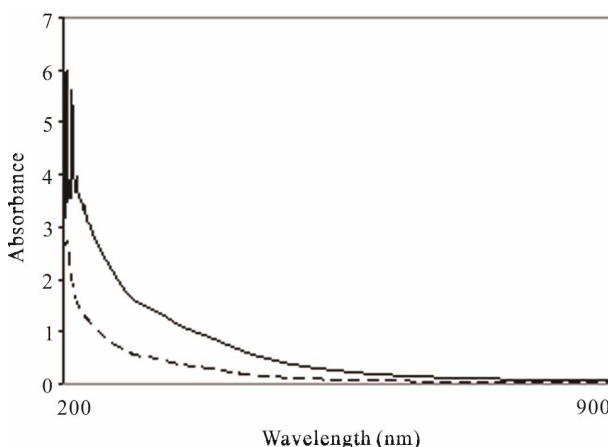


Figure 5. UV visible characterizations of industrial wastewater before (—) and after (----) electrocoagulations-*Chytriomycetes hyalinus* treatment.

4. Conclusion

All in all the *Chytriomycetes hyalinus* effect on industrial pre-treated wastewater by electrocoagulations in a continuous system had a positive efficiency on pollutants removal. The electrochemical pulse with aluminum electrodes extends the pollutants bioavailability to *Chytriomycetes hyalinus*. Color and turbidity exhibited a reduction with 90% efficiency, COD 62%, BOD₅ 69%, nitrate 86% and nitrite 60%. *Chytriomycetes hyalinus* sporangial bio-mass (SB) heightens exponentially attending to a $y = 94.302e^{0.0356x}$ model, additionally increases when pollutant concentration fall, so as COD, BOD₅, nitrate and nitrite values. Finally the pollutants removed exposes a UV-visible spectra corresponding to organic pollutants.

5. Acknowledgements

The authors wish to acknowledge CONACYT and Universidad Autónoma del Estado de México for the support given to this project 2794/2010-2011.

REFERENCES

- [1] S. Golubic, G. Radtke and T. Le, "Campion-Alsumard, Endolithic Fungi in Marine Ecosystems," *Trends in Microbiology*, Vol. 13, No. 5, 2005, pp. 229-234. [doi:10.1016/j.tim.2005.03.007](https://doi.org/10.1016/j.tim.2005.03.007)
- [2] J. Sumathi and R. Chandralata, "Anaerobic Denitrifications in Fungi from the Coastal Marine Sediments off Goa, India," *Mycological Research*, Vol. 113, No. 1, 2009, pp. 100-109. [doi:10.1016/j.mycres.2008.08.009](https://doi.org/10.1016/j.mycres.2008.08.009)
- [3] G. Hageskal, N. Lima and I. Skaar, "The Study of Fungi in Drinking Water," *Mycological Research*, Vol. 113, No. 2, 2009, pp. 165-172. [doi:10.1016/j.mycres.2008.10.002](https://doi.org/10.1016/j.mycres.2008.10.002)
- [4] M. Barreto-Rodríguez, J. V. Souza, S. E. Silva, T. F. Silva and C. B. T. Pavia, "Combined Photocatalytic and Fungal Processes for the Treatment of Nitrocellulose Industry Wastewater," *Journal of Hazardous Materials*, Vol. 161, No. 2-3, 2009, pp. 1569-1573. [doi:10.1016/j.jhazmat.2008.05.012](https://doi.org/10.1016/j.jhazmat.2008.05.012)
- [5] T. Dalsgaard, D. E. Canfield, J. Petersen, B. Thamdrup and J. Acuña-González, "N₂ Productions by the Anammox Reactions in the Anoxic Water Column of Golfo Dulce, Costa Rica," *Nature*, 422, No. 6932, 2003, pp. 606-608. [doi:10.1038/nature01526](https://doi.org/10.1038/nature01526)
- [6] G. Buttiglieri, F. Malpei, E. Daverio, M. Melchiori, H. Nieman and J. Lighthart, "Denitrification of Drinking Water Sources by Advanced Biological Treatment Using a Membrane Bioreactor," *Desalination*, Vol. 178, No. 1-3, 2005, pp. 211-218. [doi:10.1016/j.desal.2004.11.038](https://doi.org/10.1016/j.desal.2004.11.038)
- [7] Y. T. Ahn, S. T. Kang, S. R. Chae, C. Y. Lee, B. U. Bae and H. S. Shin, "Simultaneous High-Strength Organic and Nitrogen Removal with Combined Anaerobic Upflow Bed Filter and Aerobic Membrane Bioreactor," *Desalination*, Vol. 202, No. 1-3, 2007, pp. 114-121. [doi:10.1016/j.desal.2005.12.046](https://doi.org/10.1016/j.desal.2005.12.046)
- [8] T. R. Thomsen, Y. Kong and P. H. Nielsen, "Ecophysiology of Abundant Denitrifying Bacteria In-Activated Sludge," *Microbiology Ecological*, Vol. 60, No. 3, 2007, pp. 370-382. [doi:10.1111/j.1574-6941.2007.00309.x](https://doi.org/10.1111/j.1574-6941.2007.00309.x)
- [9] K. Rajender, R. N. Bishnoi and K. G. Bishnoi, "Biosorption of Chromium Cr (VI) from Aqueous Solutions and Electroplating Wastewater Using Fungal Biomass," *Chemical Engineering Journal*, Vol. 135, No. 3, 2008, pp. 202-209.
- [10] J. Bo, X. Q. Yan, Q. Yu and J. H. Van Leeuwen, "A Comprehensive Pilot Plant System for Fungal Biomass Protein Productions and Wastewater Reclamation," *Advances in Environmental Research*, Vol. 6, No. 2, 2002, pp. 179-189. [doi:10.1016/S1093-0191\(01\)00049-1](https://doi.org/10.1016/S1093-0191(01)00049-1)
- [11] A. Zahangir and A. Fakhru'l-Razi, "Enhanced Settability and Dewaterability of Fungal Treated Domestic Wastewater Sludge by Liquid State Bioconversion Process," *Water Research*, Vol. 37, No. 5, 2003, pp. 1118-1124. [doi:10.1016/S0043-1354\(02\)00452-9](https://doi.org/10.1016/S0043-1354(02)00452-9)
- [12] Y. Z. Zhang, B. Jin, H. Z. Bai and Y. X. Wang, "Production of Fungal Biomass Protein Using Microfungi from Winery Wastewater Treatment," *Bioresour. Technology*, Vol. 99, No. 9, 2008, pp. 3871-3876. [doi:10.1016/j.biortech.2006.10.047](https://doi.org/10.1016/j.biortech.2006.10.047)
- [13] E. Liwarska-Bizukojc, "Application of Image Analysis Techniques in Activated Sludge Wastewater Treatment Processes," *Biotechnology Letters*, Vol. 27, No. 19, 2005, pp. 1427-1433. [doi:10.1007/s10529-005-1303-2](https://doi.org/10.1007/s10529-005-1303-2)
- [14] D. K. Sharma, H. S. Saini, M. Singh, S. S. Chinni and B. S. Chadha, "Biological Treatment of Textile Dye Acid Violet-17 by Bacterial Consortium in an Up-Flow Immobilized Cell Bioreactor," *Letters in Applied Microbiology*, Vol. 38, No. 5, 2004, pp. 345-350. [doi:10.1111/j.1472-765X.2004.01500.x](https://doi.org/10.1111/j.1472-765X.2004.01500.x)
- [15] C. J. Van der Gast, A. S. Whiteley and I. P. Thompson, "Temporal Dynamics and Degradation Activity of a Bacterial Inoculum for Treating Waste Metal-Working Fluid," *Environmental Microbiology*, Vol. 6, No. 3, 2004, pp. 254-263. [doi:10.1111/j.1462-2920.2004.00566.x](https://doi.org/10.1111/j.1462-2920.2004.00566.x)
- [16] C. Kragelund, C. Levantesi, A. Borger, K. Thelen, D. Eikelboom, V. Tandoi, Y. Kong, J. Van der Waarde, J. Krooneman, S. Rossetti and T. R. Thomsen-Nielsen, "Identity, Abundance and Ecophysiology of Filamentous *Chloroflexi* Species Present in Activated Sludge Treatment Plants," *Microbiological Ecology*, Vol. 59, No. 3, 2007, pp. 671-682. [doi:10.1111/j.1574-6941.2006.00251.x](https://doi.org/10.1111/j.1574-6941.2006.00251.x)
- [17] S. Rossetti, M. Tomei, P. Nielsen and V. Tandoi, "*Microthrix parvicella*, a Filamentous Bacterium Causing Bulking and Foaming in Activated Sludge Systems: A Review of Current Knowledge," *Microbiology Review*, Vol. 29, No. 1, 2005, pp. 49-64.
- [18] V. L. Barbosa, S. D. Atkins, V. P. Barbosa, J. E. Burgess and R. M. Stuetz, "Characterization of *Thiobacillus thioparus* Isolated from an Activated Sludge Bioreactor Used for Hydrogen Sulfide Treatment," *Journal of Applied Microbiology*, Vol. 101, No. 6, 2006, pp. 1269-1281. [doi:10.1111/j.1365-2672.2006.03032.x](https://doi.org/10.1111/j.1365-2672.2006.03032.x)
- [19] F. Fatone, D. Bolzonella, P. Battistoni and F. Cecchi, "Removal of Nutrients and Micropollutants Treating Low Loaded Wastewaters in a Membrane Bioreactor Operating the Automatic Alternate-Cycles Process," *Desalination*, Vol. 183, No. 1-3, 2005, pp. 395-405. [doi:10.1016/j.desal.2005.02.055](https://doi.org/10.1016/j.desal.2005.02.055)
- [20] J. D. Jang, J. P. Barford, A. Lindawati and R. Renneberg, "Application of Biochemical Oxygen Demand (BOD) Biosensor for Optimization of Biological Carbon and Nitrogen Removal from Synthetic Wastewater in a Sequencing Batch Reactor System," *Biosensor and Bioelectrode*, Vol. 19, No. 8, 2004, pp. 805-812. [doi:10.1016/j.bios.2003.08.009](https://doi.org/10.1016/j.bios.2003.08.009)
- [21] C. Della Rocca, V. Belgiorio and S. Meric, "Over-View of *In-Situ* Applicable Nitrate Removal Processes," *Desalination*, Vol. 204, No. 1-3, 2007, pp. 46-62. [doi:10.1016/j.desal.2006.04.023](https://doi.org/10.1016/j.desal.2006.04.023)
- [22] Y. H. Kim, E. D. Hwang, W. S. Shin, J. H. Choi, T. W. Ha and S. J. Choi, "Treatments of Stainless Steel Wastewater Containing a High Concentration of Nitrate Using Reverse Osmosis and Nanomembranes," *Desalination*, Vol. 202, No. 1-3, 2007, pp. 286-292. [doi:10.1016/j.desal.2005.12.066](https://doi.org/10.1016/j.desal.2005.12.066)
- [23] M. Milovanovic, "Water Quality Assessment and Determination of Pollution Sources along the Axios/Vardar

- River, Southeastern Europe,” *Desalination*, Vol. 213, No. 1-3, 2007, pp. 159-173. [doi:10.1016/j.desal.2006.06.022](https://doi.org/10.1016/j.desal.2006.06.022)
- [24] M. Ricart, E. Guasch, M. Alberch, D. Berce l, C. Bonnineau, A. Geiszinger, M. La Farr e, J. Ferrer, F. Ricciardi, A. Roman ı, S. Mor ın, L. Proia, L. Sala, D. Sureda and S. Sabater, “Triclosan Persistence through Wastewater Treated Plants and Its Potential Toxic Effects on River Biofilms,” *Aquatic Toxicology*, Vol. 100, No. 4, 2010, pp. 346-353. [doi:10.1016/j.aquatox.2010.08.010](https://doi.org/10.1016/j.aquatox.2010.08.010)
- [25] P. Ca nizares, R. Paz, C. S aez and M. A. Rodrigo, “Cost of the Electrochemical Oxidation of Wastewaters: A Comparison with Ozonations and Fenton Oxidation Processes,” *Journal of Environment Management*, Vol. 90, No. 1, 2009, pp. 410-420. [doi:10.1016/j.jenvman.2007.10.010](https://doi.org/10.1016/j.jenvman.2007.10.010)
- [26] K. V. Padoley, S. N. Mudliar, S. K. Banerjee, S. C. Deshmukh and R. A. Pandey, “Fenton Oxidation: A Pre-treatment Option for Improved Biological Treatment of Pyridine and 3-Cyanopyridine Plant Wastewater,” *Chemical Engineering Journal*, Vol. 166, No. 1, 2011, pp. 1-9. [doi:10.1016/j.cej.2010.06.041](https://doi.org/10.1016/j.cej.2010.06.041)
- [27] O. Amuda and I. Amoo, “Coagulation/Flocculation Process and Sludge 5 Conditioning in Beverage Industrial Wastewater Treatment,” *Journal of Hazardous Materials*, Vol. 141, No. 3, 2007, pp. 778-783. [doi:10.1016/j.jhazmat.2006.07.044](https://doi.org/10.1016/j.jhazmat.2006.07.044)
- [28] R. Braz, A. Pirra, M. Lucas and J. Peres, “Combinations of Long Term Aerated Storage and Chemical Coagulations/Flocculations to Winery Wastewater Treatment,” *Desalinations*, Vol. 263, No. 1-3, 2010, pp. 226-232. [doi:10.1016/j.desal.2010.06.063](https://doi.org/10.1016/j.desal.2010.06.063)
- [29] C. Barrera-D ıaz, G. Roa-Morales, L. Avila-Cordoba, T. Pavon-Silva and B. Bilyeu, “Electrochemical Treatment Applied to Food-Processing Wastewater Treatment,” *Industrial Engineering Chemical Research*, Vol. 45, No. 1, 2006, pp. 34-38. [doi:10.1021/ie050594k](https://doi.org/10.1021/ie050594k)
- [30] M. Panizza and G. Cerisola, “Electrochemical Oxidation as a Final Treatment of Synthetic Tannery Wastewater,” *Environment Science Technology*, Vol. 38, No. 20, 2004, pp. 5470-5475. [doi:10.1021/es049730n](https://doi.org/10.1021/es049730n)
- [31] D. Rajkumar and K. Palanivelu, “Electrochemical Degradations of Cresols for Wastewater Treatment,” *Industrial Engineering Chemical Research*, Vol. 42, No. 9, 2003, pp. 1833-1839. [doi:10.1021/ie020759e](https://doi.org/10.1021/ie020759e)
- [32] G. Roa-Morales, E. Campos-Medina, E. Aguilera-Cotero, B. Bilyeu and C. Barrera, “Aluminium Electrocoagulation with Peroxide Applied to Wastewater from Pasta and Cookie Processing,” *Separations and Purifications Technology*, Vol. 54, No. 1, 2006, pp. 124-129. [doi:10.1016/j.seppur.2006.08.025](https://doi.org/10.1016/j.seppur.2006.08.025)
- [33] M. Tejocote-P erez, P. Balderas-Hern andez, C. E Barrera-D ıaz, G. Morales and R. Natividad-Rangel, “Treatment of Industrial Effluents by a Continuous System: Electrocoagulation-Activated Sludge,” *Bioresource Technology*, Vol. 101, No. 20, 2010, pp. 7761-7766. [doi:10.1016/j.biortech.2010.05.027](https://doi.org/10.1016/j.biortech.2010.05.027)
- [34] D. W. Graham and V. H. Smith, “Designed Ecosystem Services: Application of Ecological Principles in Wastewater Treatment Engineering,” *Fronts in Ecology and the Environment*, Vol. 2, No. 4, 2004, pp. 199-206. [doi:10.1890/1540-9295\(2004\)0021019:DESAOE12.0.CQ:2](https://doi.org/10.1890/1540-9295(2004)0021019:DESAOE12.0.CQ:2)
- [35] N. N. Sang, S. Soda, K. Sei and M. Ike, “Effect of Aeration on Stabilization of Organic Solid Waste and Microbial Populations Dynamics in Lab-Scale Landfill Bioreactors,” *Journal of Bioscience and Bioengineering*, Vol. 106, No. 5, 2008, pp. 425-432. [doi:10.1263/jbb.106.425](https://doi.org/10.1263/jbb.106.425)
- [36] NMX-AA-028-SCFI, “Water Analysis-Determination for Biochemical Oxygen Demand (BOD₅) in Natural, Wastewaters and Wastewaters Treated-Test Method,” Diario Oficial de la Federaci n, M xico, 2005.
- [37] American Public Health Association, American Water Works Association, Water Environment Federation, “Standard Methods for the Examination of Water and Wastewater,” Washington DC, Denver, Alexandria, 2005.
- [38] T. T. More, S. Yan, R. D. Tyagi and R. Y. Surampalli, “Potential Use of Filamentous Fungi for Wastewater Sludge Treatment,” *Bioresource Technology*, Vol. 101, No. 20, 2010, pp. 7691-7700. [doi:10.1016/j.biortech.2010.05.033](https://doi.org/10.1016/j.biortech.2010.05.033)
- [39] M. V. Garcia, A. C. Monteiro, M. J. P. Szabo, N. Prette and G. H. Bechara, “Mechanism of Infection and Colonization of *Rhipicephalus Sanguineus* Eggs by *Metarhizium anisopliae* as Revealed by Scanning Electron Microscopy and Histopathology,” *Brazilian Journal of Microbiology*, Vol. 36, No. 3, 2005, pp. 368-372. [doi:10.1590/S1517-83822005000400012](https://doi.org/10.1590/S1517-83822005000400012)
- [40] NMX-AA-030-SCFI, “Water Analysis-Determination for Chemical Oxygen Demand (COD) in Natural, Wastewaters and Wastewaters Treated-Test Method,” Diario Oficial de la Federaci n, M xico, 2001.
- [41] NMX-AA-034-SCFI, “Water Analysis-Determination of Salts and Solids Dissolved in Natural, Wastewaters and Wastewaters Treated-Test Method,” Diario Oficial de la Federaci n, M xico, 2001.
- [42] HACH, “Water Analysis Manual,” HACH Co., Loveland, 2008.